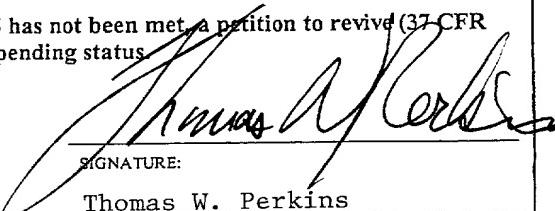


U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE FORM PTO-1390 (REV 12-29-99)		ATTORNEY'S DOCKET NUMBER PCT/FR98/02348
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/530775
INTERNATIONAL APPLICATION NO. PCT/FR98/02348	INTERNATIONAL FILING DATE 03 NOVEMBER 1998	PRIORITY DATE CLAIMED 04 NOVEMBER 1997
TITLE OF INVENTION METHOD FOR TRANSMITTING DATA AND IMPLEMENTING SERVER		
APPLICANT(S) FOR DO/EO/US Gilles KREMER		
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 16. below concern document(s) or information included:</p> <ol style="list-style-type: none"> 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: International Preliminary Examination Report International Search Report Form PCT/IB/308 Verified Statements Claiming Small Entity Status (2) Patent Data Entry Sheet 		

U.S. APPLICATION NO. (if known - see 37 CFR 1.5)	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER	
09/530775	PCT/FR98/02348	PCT/FR98/02348	
<p>17. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO..... \$840.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00</p>		CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =		\$ 840	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	21 - 20 =	1	X \$18.00
Independent claims	4 - 3 =	1	X \$78.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)		+ \$260.00	\$
TOTAL OF ABOVE CALCULATIONS =		\$ 936	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).		\$ 468	
SUBTOTAL =		\$ 468	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$ 130	
TOTAL NATIONAL FEE =		\$ 598	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		+ \$ 40	
TOTAL FEES ENCLOSED =		\$ 638	
		Amount to be refunded:	\$
		charged:	\$
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$ 638 to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required by 37 CFR § 1.16 and 1.17, or credit any overpayment to Deposit Account No. 25-0120. A duplicate copy of this sheet is enclosed.</p>			
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p>			
SEND ALL CORRESPONDENCE TO: YOUNG & THOMPSON 745 South 23rd Street Second Floor Arlington, VA 22202 CUSTOMER NO. 000466 Tel. (703)521-2297 Fax (703)685-0573		May 4, 2000  SIGNATURE: Thomas W. Perkins NAME 33,027 REGISTRATION NUMBER	

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket No. (Optional)
PCT/FR98/02348

Applicant or Patentee: Gilles KREMER

Serial or Patent No.:

Filed or Issued:

Title: METHOD FOR TRANSMITTING DATA AND IMPLEMENTING SERVER

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR §1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- the specification filed herewith with title as listed above.
 the application identified above.
 the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR §1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR §1.9(d) or a nonprofit organization under 37 CFR §1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- No such person, concern, or organization
 Each such person, concern or organization is listed below.
Magic Axess
28 rue Jean Jaures
92800 Puteaux, France

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR §1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR §1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon, or any patent to which this verified statement is directed.

Gilles KREMER

NAME OF INVENTOR

Signature of inventor

APRIL 26 / 2000

Date

NAME OF INVENTOR

Signature of inventor

Date

NAME OF INVENTOR

Signature of inventor

Date

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket No.(optional)
PCT/FR98/02348

Applicant or Patentee: **Gilles KREMER**

Serial or Patent No.:

Filed or Issued:

Title: METHOD FOR TRANSMITTING DATA AND IMPLEMENTING SERVER

I hereby declare that I am

the owner of the small business concern identified below.

an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF SMALL BUSINESS CONCERN **Magic Axess**

ADDRESS OF SMALL BUSINESS CONCERN **28 rue Jean Jaures, 92800 Puteaux, France**

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 37 CFR 121.12, are reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

X	the specification filed herewith with title as listed above.
	the application identified above.
	the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).


Each person, concern or organization having any rights in the invention is listed below:

X	no such person, concern, or organization exists.
	each such person, concern, or organization is listed below.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR §1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR §1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING KREMER Gilles
TITLE OF PERSON IF OTHER THAN OWNER _____
ADDRESS OF PERSON SIGNING _____
SIGNATURE  DATE APRIL 26 / 2000

09/530775
526 Rec'd PCT/PTO 04 MAY 2000

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Gilles KREMER

Serial No. (unknown)

Filed herewith

METHOD FOR TRANSMITTING DATA
AND IMPLEMENTING SERVER

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents

Washington, D.C. 20231

Sir:

Prior to the first Official Action and calculation of the filing fee, please amend the above-identified application as follows:

IN THE CLAIMS:

Cancel claim 2.

Cancel claim 3.

Cancel claim 5.

Cancel claim 6.

Cancel claim 7.

Cancel claim 8.

Cancel claim 9.

Claim 11, lines 1 and 2, change "one of claims 1-10," to --claim 1,--.

Claim 12, lines 1 and 2, change "one of claims 1-11," to --claim 1,--.

Claim 13, lines 1 and 2, change "one of claims

Gilles KREMER

1-12," to --claim 1,--.

Claim 14, lines 1 and 2, change "one of claims
1-13," to --claim 1,--.

Claim 15, lines 1 and 2, change "one of claims
1-14," to --claim 1,--.

Claim 16, lines 1 and 2, change "one of claims
1-15," to --claim 1,--.

Claim 17, lines 1 and 2, change "one of claims
1-16," to --claim 1,--.

Claim 18, lines 1 and 2, change "one of claims
1-17," to --claim 1,--.

Claim 20, lines 1 and 2, change "one of claims 9 or
19," to --claim 9,--.

Claim 21, lines 1 and 2, change "one of the claims
9, 19 or 20," to --claim 9,--.

Claim 22, lines 1 and 2, change "one of claims 1 to
21," to --claim 1,--.

Claim 23, lines 1 and 2, change "one of claims 1 to
22," to --claim 1,--.

Claim 25, lines 1 and 2, change "one of claims 1 to
24," to --claim 1,--.

Cancel claim 28.

Cancel claim 29.

Add the following new claims:

--30. Procédé de transmission d'un message électronique sécurisé comportant :

- une opération de réception par un système de traitement d'information, en provenance d'un utilisateur, par l'intermédiaire d'un réseau de communication :

- . du message à transmettre,
- . d'un identifiant de l'utilisateur, et
- . d'un identifiant d'un destinataire dudit message (603, 604) ;

- une opération d'ouverture d'une session de communication entre un moyen de communication situé à distance correspondant à l'identifiant du destinataire dudit message, et le système de traitement d'information :

- une opération de génération, par ledit système de traitement d'information, d'une première information dite « confidentielle » à usage unique, c'est-à-dire ne pouvant être utilisée que pendant ladite session de communication ;

et, durant ladite session de communication :

. une opération de transmission, par le système de traitement d'information, de la première information confidentielle par l'intermédiaire d'un premier support de transmission (605),

. une opération de réception, par le système de traitement d'information, de ladite première information confidentielle en provenance d'un deuxième support de transmission différent du premier support de transmission (608),

. une opération de vérification de la première information confidentielle (610), par ledit système de traitement d'information, et

. si la première information confidentielle est vérifiée, une opération de fourniture du message sécurisé, par le système de traitement d'information, au moyen de communication situé à distance correspondant à l'identifiant du destinataire dudit message.—

Respectfully submitted,

YOUNG & THOMPSON

By

Thomas W. Perkins
Attorney for Applicant
Registration No. 33,027
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

May 4, 2000

WO 99/23617

PCT/FR98/02348

**PROCESS FOR THE TRANSMISSION OF INFORMATION
AND SERVER USING IT**

The present invention relates to a process for the transmission of information and a computer server using it. It permits ensuring that the person operating a terminal is an authorized or entitled person. It applies in particular to the verification of the identity of the person which has access to a remote service, no matter what terminal is used. It permits authenticating the identification of the user, authenticating the transaction, verifying the integrity of this transaction by completing it with the amount of said transaction, the quantity bought, the name of the product or service acquired, thereby to permit the payment for goods or services, on line, which is to say in the course of a communication between remote computer systems.

The fields of application of the invention are for example the control of access, the provision of confidential information to the proper party, the certification of transactions or payment for goods or services on a computer network.

The practice of remote transactions on a network poses, independently of encryption, the problem of authentica-

tion of the person doing it, of the integrity of the transaction and of its confidentiality. In numerous applications (electronic commerce, remote banking, telecommuting, internal security of enterprises, security of for-pay databases, for example) and on all supports (local or remote computer networks, for example, respectively, the community networks called "Intranet" or "Internet", voice servers, for example), this problem is crucial.

10 The security devices and processes known to the prior art, like those disclosed in U.S. Patent 5,442,704, which use a memory card, impose important and costly material constraints.

15 Other software devices, based on encryption systems, ensure the confidentiality of the data without guaranteeing the authentication of the person.

20 Other devices using an authentication means, known as an "authentifier" or a "token", which computes from data received in the course of a transaction and from a secret key which it keeps in its memory, a dynamic password. These devices again require important and costly material constraints.

The present invention seeks to remedy these drawbacks. To this end, the present invention provides for the combined use of at least two communication networks.

25 In other words, the present invention proposes the transmission, to a user of a first communication support, of

confidential information, on a second information support, preferably secured, with:

- a mechanism for synchronizing two communications on the two networks, and

- 5 a return operation, from one communication support to the other, under the initiative of the user, by preferential manual acquisition, of confidential information received on the other support.

To this end, the present invention provides, according to a first aspect, a process for the transmission of data on a first transmission support, characterized in that it comprises:

- an operation of opening a communication session with a remote communication means, on said first transmission support,

and, during said session:

. an operation of receiving confidential information on a terminal with a single address on a second transmission support, and

. 20 a transmission operation, on the first transmission support, of a confidential message representing said confidential information.

The present invention provides, according to a second aspect, a process for the transmission of information on a first transmission support, characterized in that it comprises:

- an operation of opening, by means of a terminal with a single address on said first transmission support, a communication session with a remote communication means,

and, during said session:

. an operation of receiving confidential information on the first transmission support, and

. an operation of transmission, on a second transmission support, of a confidential message representative of said confidential information.

The present invention provides, according to a third aspect, a process for the transmission of information on a first communication support, characterized in that it comprises:

- an operation of opening, by means of a first terminal, a communication session with a remote communication means, on said first communication support,

- an operation of opening, by means of a second terminal, a communication session with a remote communication means, on a second communication support,

- when the two sessions are open, an operation of receiving confidential information on said communication supports on which one of the terminals has a single address, and

- an operation of transmission, on another of said communication supports, of a confidential message representing said confidential information.

The present invention provides, according to a fourth aspect, a process for the transmission of information on a first transmission support, characterized in that it comprises:

5 - an operation of opening a communication session with a remote communication means, on said first transmission support,

and, during said session:

10 . an operation of generating confidential information and transmitting said confidential information on a second transmission support to a terminal having a single address on the second support,

. an operation of receiving, on the first transmission support, a confidential message adapted to be representative of said confidential information, and

. an operation of verifying the correspondence between said confidential message and said confidential information.

The present invention provides, according to a fifth aspect, a process for the transmission of information on a so-called "second" transmission support, said transmission support forming a part of a communication network, characterized in that it comprises:

20 - an operation of receiving, from a so-called "second" terminal, a first message representing:

. an identifier of a so-called "third" terminal having a single address on said network,

. confidential information,

• 5 . information representative of the amount of the transaction,

- a transmission operation, to the third terminal, of a second message representing:

. said confidential information and

. said amount,

10 - an operation of receiving a third message, from said second terminal, representing a transaction validation, and

15 - an incrementation operation of a register corresponding to said third terminal, by a value representative of said amount of the transaction.

The present invention provides, according to a sixth aspect, a process for the transmission of information on a so-called "second" transmission support, said transmission support forming a part of a communication network, characterized in that it comprises:

20 - an operation of receiving, from a so-called "second" terminal, a first message representative:

. of an identification of said "third" terminal having a single address on said network,

25 . confidential information,

. information representative of an amount of a transaction,

- a transmission operation, to the third terminal, of a second message representative:

• 5 . of said confidential information and

. of said amount,

- an operation of receiving a third message, from said second terminal, representative of a validation of a transaction, and

10 - an operation of incrementing a register corresponding to said third terminal, by a value representative of a duration of the first session.

15 It will be noted that, according to the fifth and sixth aspects of the invention, the incrementation operation can take place before or after the operation of receiving the third message.

20 The present invention provides, according to a seventh aspect, a process for the transmission of information on a so-called "second" transmission support, said transmission support forming a part of a communication network, characterized in that it comprises:

25 - an operation of receiving, from a so-called "second" terminal, a first message representative:

. of an identification of a so-called "third" terminal having a single address on said network,

. of confidential information,

. of information representative of an amount of a transaction,

- an operation of transmitting, to the third terminal, a second message representative:

• 5 . of said confidential information and

. of said amount,

- an operation of incrementation of a register corresponding to said third terminal, by a predetermined value.

The present invention provides, according to an eighth aspect, a process for the transmission of information, between a first terminal and a second terminal, on a first transmission support belonging to a communication network, characterized in that it comprises:

10 - an operation of opening a communication session, on the first transmission support, between the first terminal and the second terminal, and

15 - an operation of transmitting, from the second terminal to a third terminal connected to a second network and having a single address on said second network, a first message representative of confidential information,

20 - an operation of transmitting, to the third terminal, a second message representative of said confidential information, and

25 - an operation of transmitting, on the first transmission support, from the first terminal and to the

second terminal, of a message representative of confidential information.

In each of the aspects of the present invention, the user, on the one hand, and the transaction, on the other hand, are thus authenticated because the transmission of confidential information, at the initiative of the user, proves his identity by the reception of this confidential information. Moreover, the engagement of the user in the two communications, proves the use of the two terminals, simultaneously, by the same user.

When one of the used networks is a mobile communication network, the practice of the invention is entirely portable, which is to say that it can be applied no matter where, by the user of the mobile communication network.

Moreover, the invention can be practiced with no matter what terminals and is independent of the material used. It does not require any adaptation of existing terminals, nor modification, nor addition of peripherals.

The simplicity of the practice of the present invention renders the tasks of authentication, billing and payment intuitive, and it does not require any apprenticeship.

It will also be noted that the confidential information can be a password or a transaction certificate.

According to particular characteristics of each of the aspects of the present invention described above:

- the confidential information is representative of
a pseudo-random number,

- the confidential information is representative of
a session number attributed to a session,

- the confidential information is representative of
the identity of the user,

- the confidential information is representative of
one or several bank and/or card account numbers,

- the confidential information is representative of
the time and date of said operation of opening the session,
and/or

- the confidential information is modified at each
of the sessions.

Thanks to each of these arrangements, the confidential
information is renewed at each session and its use is
limited to a single communication session.

According to particular characteristics of each of
the aspects of the invention set forth above:

- in the course of the reception operation of
confidential information on a terminal with a single address
on a second communication support, there is received moreover
an amount of the transaction, and/or

- in the course of operation of transmission of a
confidential message representative of confidential information,
there is moreover transmitted an amount of the transaction.

10
15
20
25

Thanks to each of these arrangements, the invention permits transactions using financial amounts, such as purchases, reservations, exchanges, loans, mortgages, guarantees ...

According to a ninth aspect, the present invention provides a process for the transmission of information on a first communication support which is part of a communication network, characterized in that it comprises:

- 5 an operation of receiving, from a first terminal, a first message representative:

- . of an amount of an envisaged transaction,
- . of an identification of the debtor,

- a transmission operation, on a second communication support, to a bank server, of a second message representative:

- . of said amount,
 - . of an identification of said debtor
 - . of a demand for approval of the debit,
- an operation of receiving or not from said bank server, a third message representative of an authorization of the debit,

20 - when the authorization is approved, an operation of transmission, to a second terminal having a single address on the second communication network, of a fourth message representative of confidential information,

- of a reception operation, from said first terminal, of a fifth message representative of said confidential information,

- of an operation of verifying the correspondence between the confidential message and the confidential information.

This ninth aspect of the present invention has the same advantages as the first and second aspects. These advantages are not repeated here.

According to particular characteristics of each aspect of the invention, after the operation of verifying the correspondence, in the case of correspondence, the process provided by the present invention, as set forth succinctly above, comprises an operation of incrementing from one account to the debit of said debtor.

Thanks to these arrangements, a statement corresponding to each amount of the transaction carried out by the debtor, can be sent to him.

According to other particular characteristics of each of the processes envisaged by the different aspects of the present invention, this process comprises, after the operation of receiving the first message, an operation of reading, in a database, of the single address of the second terminal on the second network.

Thanks to these arrangements, the debtor need only furnish this address, on the one hand, and this address is certified, on the other hand.

According to other particular characteristics of each of the processes envisaged by each of the different aspects of the present invention, this process comprises, after the operation of receiving the first message, a reading operation, in a database, of an identification of said bank server.

Thanks to these arrangements, the debtor need not supply this identification, nor a bank card, on the one hand, and this identification can be preliminarily verified, on the other hand.

According to a second aspect, the present invention provides a process for the transmission of information on a first communication support forming a portion of a communication network, characterized in that it comprises:

- an operation of receiving, from a first terminal, a first message representative:
 - . of the amount of a proposed transaction,
 - . of an identification of a debtor,
- an operation of authorizing or not a debit on a bank account,
 - when the authorization is approved, an operation of transmission, to a second terminal having a single address

on a second communication network, of a second message representative of confidential information,

- a reception operation, from said first terminal, of a third message representative of said confidential information,

- an operation of verifying the correspondence between the confidential message and the confidential information, and

- in the case in which the correspondence is verified, an operation of debiting said amount on said bank account.

According to particular characteristics of each of the aspects of the process provided by the present invention, the latter comprises an operation of manual acquisition, in the course of which the user acquires a confidential message representative of the confidential information.

Thanks to these arrangements, the engagement of the user is guaranteed by the manual acquisition which he carries out.

According to particular characteristics of each of the aspects of the process provided by the present invention, the latter comprises an operation of selection of transmission, in the course of which, of a function of predetermined criteria, the transmissions are classified into two groups, one relating to so-called "security" transmission and the other to so-called "normal" transmissions, the normal trans-

10
15
20
25

missions requiring no more than one transmission operation on a communication support.

Thanks to these arrangements, the process provided by the present invention is practiced only for a portion of the transmissions, as a function of predetermined criteria.

According to particular characteristics of each of the aspects of the process provided by the present invention, in the course of said selection operation, there is used a transaction limit amount, the so-called "secured" transmissions being those with which are associated the higher transaction amounts than said limit amount.

Thanks to these arrangements, the criterion of selection of the transmissions which are secured by the practice of the present invention are those which relate to transaction amounts greater than the limit amount.

According to particular characteristics of each of the aspects of the process provided by the present invention, the latter comprises a transmission operation of a single address on one of said networks.

According to particular characteristics of each of the aspects of the process provided by the present invention, in the course of said transmission operation of a single address, there is transmitted a certificate containing information representative of said single address.

Thanks to each of these arrangements, it is the user himself or, respectively, his computer, which, in an encrypted

mode or not, transmits on one of the networks a single address which it has on one of the networks that is used.

According to particular characteristics of each of the aspects of the process provided by the present invention, said certificate responds to a security protocol for payment and comprises information representative of said single address.

Thanks to these arrangements, the single address transmitted with the certificate is protected by the security payment protocol.

The present invention also provides a memory, erasable or not, which contains instructions of a program adapted to be executed by a processor and adapted to use the transmission process as succinctly set forth above.

The present invention moreover relates to a computer server, characterized in that it is adapted to use the transmission process as succinctly set forth above.

This tenth aspect, this server and this memory having the same particular characteristics and the same advantages as the nine first aspects of the present invention, set forth above, the latter are not repeated here.

Other advantages, objects and characteristics of the present invention will become apparent from the description which follows, given with respect to the accompanying drawings, in which:

- Figure 1 is a diagram of the principle of the process of the present invention;

- Figure 2 is a particular diagram for the practice of the present invention;

5 - Figure 3 shows the system architecture adapted to support the practice of the present invention;

- Figure 4 shows a succession of generic operations used by the elements shown in Figures 2 and 3;

- Figure 5 shows a succession of operations used by the elements shown in Figures 2 and 3, in the framework of the application of the present invention to authentication; and

- Figure 6 shows a series of operations used by the elements shown in Figures 2 and 3, in the framework of a use of the present invention for the certification of messages;

15 - Figure 7 shows a sequence of operations used by the elements shown in Figures 2 and 3, in the framework of the application of the present invention to electronic line payment, in the case of service without a contract;

20 - Figure 8 shows a sequence of operations practiced by the elements shown in Figures 2 and 3, in the framework of the use of the present invention for electronic on-line payment, in the case of contract service;

25 - Figure 9 shows a sequence of operations practiced by the elements shown in Figures 2 and 3, in the framework of the use of the present invention for payment with a known electronic payment terminal;

16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
22310
22311
22312
22313
22314
22315
22316
22317
22318
22319
22320
22321
22322
22323
22324
22325
22326
22327
22328
22329
22330
22331
22332
22333
22334
22335
22336
22337
22338
22339
22340
22341
22342
22343
22344
22345
22346
22347
22348
22349
22350
22351
22352
22353
22354
22355
22356
22357
22358
22359
22360
22361
22362
22363
22364
22365
22366
22367
22368
22369
22370
22371
22372
22373
22374
22375
22376
22377
22378
22379
22380
22381
22382
22383
22384
22385
22386
22387
22388
22389
22390
22391
22392
22393
22394
22395
22396
22397
22398
22399
223100
223101
223102
223103
223104
223105
223106
223107
223108
223109
223110
223111
223112
223113
223114
223115
223116
223117
223118
223119
223120
223121
223122
223123
223124
223125
223126
223127
223128
223129
223130
223131
223132
223133
223134
223135
223136
223137
223138
223139
223140
223141
223142
223143
223144
223145
223146
223147
223148
223149
223150
223151
223152
223153
223154
223155
223156
223157
223158
223159
223160
223161
223162
223163
223164
223165
223166
223167
223168
223169
223170
223171
223172
223173
223174
223175
223176
223177
223178
223179
223180
223181
223182
223183
223184
223185
223186
223187
223188
223189
223190
223191
223192
223193
223194
223195
223196
223197
223198
223199
223200
223201
223202
223203
223204
223205
223206
223207
223208
223209
223210
223211
223212
223213
223214
223215
223216
223217
223218
223219
223220
223221
223222
223223
223224
223225
223226
223227
223228
223229
223230
223231
223232
223233
223234
223235
223236
223237
223238
223239
223240
223241
223242
223243
223244
223245
223246
223247
223248
223249
223250
223251
223252
223253
223254
223255
223256
223257
223258
223259
223260
223261
223262
223263
223264
223265
223266
223267
223268
223269
223270
223271
223272
223273
223274
223275
223276
223277
223278
223279
223280
223281
223282
223283
223284
223285
223286
223287
223288
223289
223290
223291
223292
223293
223294
223295
223296
223297
223298
223299
2232100
2232101
2232102
2232103
2232104
2232105
2232106
2232107
2232108
2232109
2232110
2232111
2232112
2232113
2232114
2232115
2232116
2232117
2232118
2232119
2232120
2232121
2232122
2232123
2232124
2232125
2232126
2232127
2232128
2232129
2232130
2232131
2232132
2232133
2232134
2232135
2232136
2232137
2232138
2232139
2232140
2232141
2232142
2232143
2232144
2232145
2232146
2232147
2232148
2232149
2232150
2232151
2232152
2232153
2232154
2232155
2232156
2232157
2232158
2232159
2232160
2232161
2232162
2232163
2232164
2232165
2232166
2232167
2232168
2232169
2232170
2232171
2232172
2232173
2232174
2232175
2232176
2232177
2232178
2232179
2232180
2232181
2232182
2232183
2232184
2232185
2232186
2232187
2232188
2232189
2232190
2232191
2232192
2232193
2232194
2232195
2232196
2232197
2232198
2232199
2232200
2232201
2232202
2232203
2232204
2232205
2232206
2232207
2232208
2232209
2232210
2232211
2232212
2232213
2232214
2232215
2232216
2232217
2232218
2232219
2232220
2232221
2232222
2232223
2232224
2232225
2232226
2232227
2232228
2232229
22322210
22322211
22322212
22322213
22322214
22322215
22322216
22322217
22322218
22322219
22322220
22322221
22322222
22322223
22322224
22322225
22322226
22322227
22322228
22322229
223222210
223222211
223222212
223222213
223222214
223222215
223222216
223222217
223222218
223222219
223222220
223222221
223222222
223222223
223222224
223222225
223222226
223222227
223222228
223222229
2232222210
2232222211
2232222212
2232222213
2232222214
2232222215
2232222216
2232222217
2232222218
2232222219
2232222220
2232222221
2232222222
2232222223
2232222224
2232222225
2232222226
2232222227
2232222228
2232222229
22322222210
22322222211
22322222212
22322222213
22322222214
22322222215
22322222216
22322222217
22322222218
22322222219
22322222220
22322222221
22322222222
22322222223
22322222224
22322222225
22322222226
22322222227
22322222228
22322222229
223222222210
223222222211
223222222212
223222222213
223222222214
223222222215
223222222216
223222222217
223222222218
223222222219
223222222220
223222222221
223222222222
223222222223
223222222224
223222222225
223222222226
223222222227
223222222228
223222222229
2232222222210
2232222222211
2232222222212
2232222222213
2232222222214
2232222222215
2232222222216
2232222222217
2232222222218
2232222222219
2232222222220
2232222222221
2232222222222
2232222222223
2232222222224
2232222222225
2232222222226
2232222222227
2232222222228
2232222222229
22322222222210
22322222222211
22322222222212
22322222222213
22322222222214
22322222222215
22322222222216
22322222222217
22322222222218
22322222222219
22322222222220
22322222222221
22322222222222
22322222222223
22322222222224
22322222222225
22322222222226
22322222222227
22322222222228
22322222222229
223222222222210
223222222222211
223222222222212
223222222222213
223222222222214
223222222222215
223222222222216
223222222222217
223222222222218
223222222222219
223222222222220
223222222222221
223222222222222
223222222222223
223222222222224
223222222222225
223222222222226
223222222222227
223222222222228
223222222222229
2232222222222210
2232222222222211
2232222222222212
2232222222222213
2232222222222214
2232222222222215
2232222222222216
2232222222222217
2232222222222218
2232222222222219
2232222222222220
2232222222222221
2232222222222222
2232222222222223
2232222222222224
2232222222222225
2232222222222226
2232222222222227
2232222222222228
2232222222222229
22322222222222210
22322222222222211
22322222222222212
22322222222222213
22322222222222214
22322222222222215
22322222222222216
22322222222222217
22322222222222218
22322222222222219
22322222222222220
22322222222222221
22322222222222222
22322222222222223
22322222222222224
22322222222222225
22322222222222226
22322222222222227
22322222222222228
22322222222222229
223222222222222210
223222222222222211
223222222222222212
223222222222222213
223222222222222214
223222222222222215
223222222222222216
223222222222222217
223222222222222218
223222222222222219
223222222222222220
223222222222222221
223222222222222222
223222222222222223
223222222222222224
223222222222222225
223222222222222226
223222222222222227
223222222222222228
223222222222222229
2232222222222222210
2232222222222222211
2232222222222222212
2232222222222222213
2232222222222222214
2232222222222222215
2232222222222222216
2232222222222222217
2232222222222222218
2232222222222222219
2232222222222222220
2232222222222222221
2232222222222222222
2232222222222222223
2232222222222222224
2232222222222222225
2232222222222222226
2232222222222222227
2232222222222222228
2232222222222222229
22322222222222222210
22322222222222222211
22322222222222222212
22322222222222222213
22322222222222222214
22322222222222222215
22322222222222222216
22322222222222222217
22322222222222222218
22322222222222222219
22322222222222222220
22322222222222222221
22322222222222222222
22322222222222222223
22322222222222222224
22322222222222222225
22322222222222222226
22322222222222222227
22322222222222222228
22322222222222222229
223222222222222222210
223222222222222222211
223222222222222222212
223222222222222222213
223222222222222222214
223222222222222222215
223222222222222222216
223222222222222222217
223222222222222222218
223222222222222222219
223222222222222222220
223222222222222222221
223222222222222222222
223222222222222222223
223222222222222222224
223222222222222222225
223222222222222222226
223222222222222222227
223222222222222222228
223222222222222222229
2232222222222222222210
2232222222222222222211
2232222222222222222212
2232222222222222222213
2232222222222222222214
2232222222222222222215
2232222222222222222216
2232222222222222222217
2232222222222222222218
2232222222222222222219
2232222222222222222220
2232222222222222222221
2232222222222222222222
2232222222222222222223
2232222222222222222224
2232222222222222222225
2232222222222222222226
2232222222222222222227
2232222222222222222228
2232222222222222222229
22322222222222222222210
22322222222222222222211
22322222222222222222212
22322222222222222222213
22322222222222222222214
22322222222222222222215
22322222222222222222216
22322222222222222222217
22322222222222222222218
22322222222222222222219
22322222222222222222220
22322222222222222222221
22322222222222222222222
22322222222222222222223
22322222222222222222224
22322222222222222222225
22322222222222222222226
22322222222222222222227
22322222222222222222228
22322222222222222222229
223222222222222222222210
223222222222222222222211
223222222222222222222212
223222222222222222222213
223222222222222222222214
223222222222222222222215
223222222222222222222216
223222222222222222222217
223222222222222222222218
223222222222222222222219
223222222222222222222220
223222222222222222222221
223222222222222222222222
223222222222222222222223
223222222222222222222224
223222222222222222222225
223222222222222222222226
223222222222222222222227
223222222222222222222228
223222222222222222222229
223222

- Figure 10 shows a sequence of operations practiced by the elements shown in Figures 2 and 3, in the framework of another application of the present invention to electronic on-line payment with a third party guarantor, in the case of non-contract service;

- Figure 11 shows schematically communications of messages practiced by the use of the present invention in combination with a known payment protocol under the name of "SET" (acronym of "Secure Electronic Transaction")

- Figure 12 shows schematically communications of messages practiced by the use of the present invention in combination with a payment protocol known to those skilled in the art under the name Globeld (trademark) or Kleline (trademark); and

- Figure 13 shows schematically communications of messages used in an application of the present invention in combination with a known secured communication protocol under the name of "SSL" (acronym of "Secure Socket Level").

In Figure 1 are shown:

- a first network 10,
- a first terminal 11 of the first network,
- a second network terminal, also called hereinafter "data and message server" 40,
- a second network 20,
- a third terminal 21 of the second network, and
- a data server 30.

According to the invention, the user of the first terminal 11 is identified by his single address on the second network 20.

The latter is preferably secured, which is to say that each address is there certified by a third party guarantor, and, moreover, the information transmitted is confidential. The third person in question is preferably a telephone operator, or, more generally, any organization which has a database for the user of a single address terminal.

The terminal of the first network 11 can be for example a telephone, a computer terminal, a telecopier, a telematic terminal, a televiser provided with a box adapted to receive and emit computer data (a box commonly called a television decoder), an electric payment terminal (Figure 2).

The terminal 21 of the second network can for example be a telephone, a telecopier, a telematic terminal, a television decoder, a mobile telephone or a message receiver ("pager") or a personal digital assistant (commonly called "PDA").

In a first embodiment of the present invention, in a first instance, the user uses the terminal 11 of first network 10 to enter into communication with the data server 30. He thus opens a communication session between terminal 11 and the second terminal 40 of the network. Then, the information server 30 supplies confidential information to the user, by means:

- of the server 40 of data and messages,
- of the second network 20, and
- of the terminal 21 of the second network.

Finally, the user receives confidential information at the level of the terminal 21 of the second network and carries out a manual acquisition of a confidential message, constituted here by confidential information, to transmit it to the information server 30, in the course of the same session, by means:

- of the terminal 11 of the first network and
- of the first network 10.

The data and message server 40 then verifies the correspondence of the confidential message and the confidential information, which is to say whether the confidential message is representative of the confidential information, and, in case of correspondence, it gives access to the particular services, of confidential or of payment.

The user, on the one hand, and the transaction, on the other hand, are thus authenticated because the manual acquisition proves the identity of the user who receives the confidential information as well as simultaneous use of the two terminals by the same user.

In Figure 2 are shown:

- a first terminal, called "user" 100 connected to a first communication support 101 forming a portion of the communication network;

- an information server 103, connected to the first information support 101;

- a data server 105, connected by a telecommunication line 106 and/or a computer line 106 to the information server 103;

- a message server 109, connected by a second communication support 110 to a receiver 111 and by a third communication support 113, to the data server 105; and

- a contract database 107 connected to the message server 109 and to the data server 105.

In the embodiment described and shown here, the user terminal 100 is a personal computer (commonly called "PC") or a network computer (commonly called "NC"), or else a Minitel (trademark) which comprises a modem connected to a wire telecommunication network, for example the community telephone network. The first communication support 101 is thus a channel of this telecommunication network. The user terminal 100 uses communication software of known type, which permits it to communicate remotely with the information server 103, by means of the communication support.

The information server 103, connected to the first information support 101, is a computer server of known type, which is here adapted to use a specific software, according to the invention (shown in one of Figures 4 to 13).

The data server 105 is a computer server of known type which operates as is indicated below, relative to the

10
15
20

25

information server 103, by means of the line 106, itself also of known type.

The message server 109 is a computer system of known type which manages one or more communication networks of the known type, a channel of one of these networks constituting a second communication support. A specialized channel supplies the third support 113 for communication between the information server 103 and the message server 109.

The contract database 107 is a memory register of known type.

It will here be noted that the contract database 107 can be connected directly to several computer systems:

- to that of the service supplier in the case of a network external to a business, in particular in certain cases for the use of the present invention with a contract preliminary to the user of the service.

- in business, in the case in which the network is internal to the business,

- to one of a bank or a guarantor, in particular in the case of use of the invention without a contract.

Finally, in certain cases, the database is not necessary, the single address on the second network being supplied, on the first network, either by a certificate or payment stored in the station (or "computer") client, or by the user himself.

10
15
20
25

20

25

The second communication support 110 is a communication network of known type. On this second network, each receiver has a single address which is certified at the time of attribution of the address from the receiver 111.

• 5 The receiver 111 is, in the embodiment described and shown here, a portable telephone (commonly called "mobile") or a message receiver (commonly called "pager"), a telecopier or a fixed telephone or terminal provided with a modem. It is adapted to receive a confidential message and to place it at the disposition of the user, for example by display on a screen, spoken emission or printed on paper. As a modification, the information servers 103 and the message server 109 are combined.

It will here be observed that:

10 - in the case in which the receiver 111 serves the user only as a receiver of confidential information without emitting a confidential message, it is not necessary that it permits emission on the network 110,

20 - moreover, when, according to certain modifications of the present invention, the receiver 111 serves on the one hand to receive confidential information and on the other hand to admit a confidential message, it is necessary that it permits emission on the network 110.

25 In Figure 3, there will be noted, in a material and software architecture permitting the use of the present invention:

- a computer terminal 301,
- a computer network 302,
- an information server 103,
- a local network 304,
- a data server 105,
- a database 107,
- a message server 109,
- a network 308,
- a diffusion means 309,
- a radiotelephone network 310,
- a cell phone network 311,
- an alphanumeric message receiver 312 (called a "pager"),
- a mobile phone 313,
- a switched network 314, and
- a telephone or telecopier 315.

The computer terminal 301 is for example a microcomputer known by the term "PC". It comprises a modem permitting communication by emission and reception, with the computer network 302. The computer network 302 is in this case the worldwide computer network known by the term "Internet". The information server 103 is of known type for the practice of supplier sites of services on the network 302.

The local network 304 is of known type. It is a business network, for example of the LAN Manager (trademark)

Netware (trademark of the NOVELL company, this name also being a trademark).

The data server 105 and message server 109 are of known types. The database 107 is of known type.

• 5 The network 308 is of known type, for example of the digital network with service integration ("DNSI").

The diffusion means 309 is a hertzien emitter of a type known for the use of the mobile communication network 310. It is for example cellular or by satellite.

In the embodiment described and shown in Figure 3, at least one of the three following communication networks is used:

10 - the radiotelephone network 310 which permits only communication only in the direction of diffusion from an emitter toward alphanumeric message receivers such as the receiver 312, without these being able to emit long distance signals,

15 - the mobile telephone network 311, permitting communication in particular with mobile phones, such as the telephone 313, and

20 - a switched network 314 here permitting the communication with a fixed telephone or fixed copier 315.

25 These three networks operate under contract, with certification of the identity of the contracting party. On each of these networks, the receiver has a single address, which is to say that the address which is attributed to it is

not attributed to another receiver (except in certain cases of group contracts required by the user). This single address is embodied by a telephone number and/or an SIM card number (acronym of "Subscriber Identity Module"), which module secures the identification of the portable, for example, in the case of a mobile telecommunication network known by the name "GSM" (acronym of "Global System for Mobile").

It will here be observed that the apparatus adapted to function on the GSM network utilizes a microprocessor card. This card supplies the particular modes of the invention which permit it to operate with double security.

In the case shown in Figure 3, it is preferably the same user who uses the computer terminal 301, on the one hand, and the alphanumeric receiver 312, the mobile phone 313, the fixed telecopier or the fixed telephone, on the other hand.

Figures 4 to 9 show the different applications of the present invention, using the same formula: in each of these figures, the operations are shown from top to bottom, in the order of their chronological succession. In these figures are shown:

- in the vertical column to the left and in the form of rectangles, the operations carried out by the user, using either the terminal connected to the first communication support ("terminal A") or the terminal connected to the second communication support ("terminal B"), the terminal used being

inscribed in a lozenge with which the rectangular representing the operation in question is superposed;

- in a central column, successive transmissions of information on one or the other communication support ("A" for the computer network 302 or "B" for the telecommunication network for the networks 308, 310, 311 and/or 314), in the form of arrows whose direction corresponds to the direction of communication, which is to say the direction left to right, corresponding to the direction user toward server and the direction right to left corresponds to the direction server to user.

It will be here be noted that for each transmission of information, several signals can be exchanged between the electronic system used (synchronization, selection of communication protocol, information, redundancies, acknowledgement of transmission, retransmission in case of transmission error, ...). According to these arrows, the server "A" corresponds to the first network and the server "B" to the second network;

- on a vertical column more to the right than the two preceding ones (the right-most in Figures 4 to 6 and 9), in the form of rectangles, the operation is carried out by data server 105; and

- in Figures 7, 8 and 10, in a vertical column located right-most, a server placed in communication with the data server 105.

5

10

15

20

25

In Figure 4, there will be noted a sequence of operations used in certain applications of the invention, by the elements illustrated in Figures 2 and 3:

- in the course of an operation 200, the user of the user terminal 101 enters into communication with the information server 103, by means of the first communication support. In the course of this operation 200, it supplies a unique identifier (for example a subscriber number, a name or physical address);

- in the course of operation 201, the information server 103 attributes a unique session number upon reconnection of the "user" terminal 100 to the information server 103. In the course of this operation 201, the information server 103 transmits the identifier to the data server 105;

- in the course of operation 202, the data server 105 computes confidential information also called hereafter "secret", to the message server 109. To this end, the data server 105 calculates the secret as being a representation of an algorithm function using an invariable (which is to say a value which does not vary from one session to the other, as an identifier, for example), a variable (which is to say a value which varies with each session), to avoid repetitions (session number for example) and a time marker (which is to say a clock value) so as to limit the use of a secret time-wise. Preferably, it uses a function for working out confidential informa-

10
15
20

25

tion (or "secret"), which is irreversible, which is to say from which input information can be retrieved only when the output information is known. For the practice of operation 202, the reader could refer to well-known security algorithm books, in particular to the descriptions of the functions known as "hashing", "Message Digest", and "SHA";

- the operation 203 takes several different forms according to the identifier which is already in the database or not: if so, the single address there is read; in the negative, recourse is had to a confidential third person, who is, in this case, the operator of the second network or any other organism entitled to play the role of a confidential third party;

- in the course of operation 204, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identifier transmitted by the information server 103 to the message server 109, in the course of operation 203;

- in the course of operation 204, the message server 109 transmits, by means of the network 110, the confidential information transmitted in the course of operation 203 to the receiver 111 which possesses said unique address;

- in the course of operation 207, the confidential information, here also called "secret", is supplied to the user, either by being displayed on the display of the receiver 111, or by being given in a vocal or telecopied manner;

• 5 - in the course of operation 208, the user supplies to the information server 103, which itself transmits to the data server 105, a confidential message representative of the confidential information (for example identical to this confidential information or "secret"), by means of the user terminal keyboard 100;

- in the course of operation 205, the information server 103 receives this confidential message;

10 - in the course of test 210, the data server 105 determines whether the confidential message is representative of the confidential information generated by the data server 105, in the course of the operation 202, or not;

15 - when the result of test 210 is negative, the data server 105 transmits, to the user, an error message, by stating if desired a cause of the mishap (too much time elapsed between the transmission of confidential information and its reception, ...) and the access to the protected resources refused to the user.

20 Finally, the course of the session opened on the first communication support is of known type, but thanks to the use of the present invention, the user is precisely authenticated.

25 It will here be noted that, even if the secret were to be known, because this secret corresponds to a unique session numeral attributed dynamically by the information server 103 and because the session remains open (connected

mode) until the secret is sent, this secret could not be used to carry out fraudulent operations. Thus, any new open session will then be attributed to another secret.

In Figure 5, there will be noted a sequence of operations used by the elements shown in Figures 2 and 3, in an application of the invention to the authentication, by access to protected data:

- in the course of an operation 500, the user of the user terminal 101 enters into communication with the information server 103, by means of the first communication support. In the course of this operation 500, he supplies a unique identifier (for example a subscriber number, a name, or a physical address);

- in the course of operation 501, the information server 103 attributes a unique session numeral upon connection of the user terminal to the information server 103. In the course of this operation 501, the information server 103 transmits the identifier to the data server 105;

- in the course of operation 502, the data server 105 calculates confidential information also called in what follows "discardable password", to the message server 109. To this end, the data server 105 calculates the confidential information from an invariable (the identifier, for example), of a variable to avoid repetitions (session number, for example) and of a time marker (clock) so as to limit the use of a secret time-wise. Preferably, it uses an irreversible

10
15
20
25

confidential information computation function, which is to say from which input information can be retrieved only when the output information is known. For the practice of this operation 102, the reader could refer to the books mentioned above;

5

- in the course of operation 504, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identifier transmitted by the information server 103 to the message server 109, in the course of operation 503;

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

- in the course of operation 505, the message server 109 transmits, by means of the network 110, the confidential information also here called "disposable password", in the course of operation 503 of the receiver which has said unique address;

- in the course of operation 507, the confidential information, also here called "discardable password" is supplied to the user, either by being displayed on the display of the receiver 111, or by being given in a verbal or telecopied manner;

20

- in the course of operation 508, the user supplies to the information server 103, which itself retransmits it to the data server 105, a confidential message representative of the confidential information (for example identical to this confidential information, or "discardable password"), by means of the keyboard of the user terminal 100;

25

- in the course of operation 509, the information server 103 receives this confidential message;

- in the course of test 510, the data server 105 determines whether this confidential message is representative of the confidential information generated by the data server 105, in the course of operation 503, or not;

- when the result of test 510 is positive, the data server 105 invalidates the access to the protected information;

- when the result of test 510 is negative, the data server 105 transmits an error and access invalidation message, by stating if desired a cause of failure (too much time elapsed between the transmission of the confidential information and its reception, ...) and access to the protected information is refused.

Finally, the end of the session is of known type.

In Figure 6, there will be noted a sequence of operations used by the elements shown in Figures 2 and 3, in an application of the invention to message certification:

- following a session opening operation, not shown, between the user terminal 100 and the information server 103,

- in the course of operation 601, the information server 103 attributes a unique session number;

- in the course of an operation 600, the user of the "user" terminal 100 initiates, on the first communication support, a transaction procedure (for example inter-account

transfer, payment command or order) (see above with respect to Figure 4);

- in the course of operation 603, the data server 105 computes confidential information also called in what follows "certificate of message" from an invariable (the identifier, for example), from a variable to avoid repetitions (session number, for example) and from a time marker (clock) so as to limit the use of a secret time-wise. Preferably, it uses an irreversible confidential information calculating function, which is to say information cannot be retrieved from the inlet when that of the outlet is known. For practice of the operation 603, the reader could refer to the books mentioned above;

- in the course of operation 604, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identifier transmitted by the information server 103, to the message server 109, in the course of operation 603;

- in the course of operation 605, the message server 109 transmits, by means of the network 110, the confidential information also here called "message certificate", transmitted in the course of operation 603 to the receiver 111 which has said unique address;

- in the course of operation 607, the confidential information, here called "message certificate" is supplied to

10
15
20
25

the user, either by being displayed on the display of the receiver 111, or by being given orally or by telecopy;

• 5 - in the course of operation 608, the user supplies to the information server 103, which itself retransmits it to the data server 105, a confidential message representative of confidential information (for example identical to this confidential information or "message certificate"), by means of the keyboard of the user terminal 100;

10 - in the course of operation 609, the information server 103 receives this confidential message;

15 - in the course of test 610, the data server 105 determines whether this confidential message is representative of confidential information generated by the data server 105, in the course of operation 603, or not;

20 - when the result of test 610 is positive, the data server 105 validates the transaction carried out, and then restarts;

25 - when the result of test 610 is negative, the data server 105 transmits an error message and invalidates the transaction, by pointing out if desired a failure cause (too much time elapsed between the transmission of the confidential information and its reception, ...) and does not carry out the transaction.

Finally, the end of the session is of known type.

According to a modification (not shown) :

- in the course of operation 603, the "message certificate" is also determined, by the data server 105, from an amount of a transfer and/or a bank account number emitter and/or a bank account number receiver,

5 - in the course of operation 605, the message server 109 transmits, by means of the network 110, a confidential information and the amount of the transfer, in the clear and, more generally, information representative of the transaction carried out (product or service acquired and quantity involved); and

10 - in the course of operation 607, the confidential information as well as the amount are supplied to the user who verifies the integrity of the amount of the transfer taking place.

15 In Figure 7, there is seen a sequence of operations performed by the elements shown in Figures 2 and 3, in an application of the invention to electronic in-line payment, in the case of a service without a contract:

20 - following a session-opening operation, not shown, between the user terminal 100 and the information server 103,

- in the course of operation 700, the information server 103 attributes a secret unique session numeral;

25 - in the course of an operation 701, the information server 103 receives from the user terminal 100, an identification;

- in the course of an operation 702, the user of the user terminal 101 selects the goods or services which he desires to buy, then institutes a payment procedure (see above with respect to Figure 4);

• 5 - in the course of operation 703, the data server 105 receives the payment request from the user terminal 100;

- in the course of operation 704, the user supplies to the information server 103 confidential information concerning his payment card;

10 - in the course of an operation 705, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identification transmitted by the information server 103 to the message server 109, in the course of operation 701;

15 - in the course of operation 707, the data server 105 carries out a request for bank authorization to the server 106 from a bank where the user has an account to which is associated the payment card involved in operation 704. The data server 105 supplies the amount of the transaction envisaged to the bank server 706. The information server 103 receives, in turn, from the bank server 706, a payment authorization, according to the bank modalities of known type which depend in particular on the conventions shared by the bank and the client in question and the eventual authorization debiting said account (see the protocol known to those in the
20
25

art under the name "BCAS" for "Bank Card Authorization System");

- in the course of an operation 708, the information server 103 computes confidential information also called "transaction certificate" from:

- 5 . an invariable (the identification, for example),
 - . from a variable to avoid repetitions (session number, for example),
 - . from the amount of the transaction and
 - . from a time marker (the clock) so as to limit the use of a secret time-wise.

Preferably, he uses a function for irreversibly calculating confidential information, which is to say of which the input information cannot be retrieved when the output information is known. To use operation 708, the reader can refer to the books mentioned above. In the course of this operation 708, the transaction certificate and the amount of the transaction envisaged are sent, by means of the network 110, to the receiver 111 which possesses said unique address;

- in the course of operation 709, the confidential information, also called "certificate of transaction" is placed at the disposition of the user, conjointly to the amount of the transaction, in clear, either by being displayed on the display of the receiver 111, or by being given verbally or by telecopy, which permits the control, by the user, of the integrity of the transaction that he carries out;

10
15
20
25

20

25

- in the course of operation 710, the user supplies to the information server 103, which, itself, retransmits it to the data server 105, a confidential message identical to (or as a modification, representative of) the confidential information constituted by the transaction certificate, by means of the keyboard of the user terminal 100;

- in the course of operation 711, the information server 103 receives this confidential message;

- in the course of test 712, the data server 105 determines whether the confidential message is representative of the confidential information generated by the data server 105, in the course of operation 708, or not;

- when the result of test 712 is positive, the data server 105 validates the payment carried out, this payment being effectively carried out between the bank entities according to known techniques, then resumes the operation of presenting commercial offers;

- when the result of test 712 is negative, the data server 105 transmits to the user an error message and invalidates the payment, by specifying if desired a malfunction (too much time elapsed between transmission of the confidential information and its reception, ...) and the payment is not carried out.

Finally, the end of the session is of known type.

100
10
15
20
25
30

20

As a modification of the embodiment shown in Figure 7, the operation 707 is carried out after all the other operations, but before the end of the session.

In Figure 8, there is seen a sequence of operations carried out by the elements shown in Figures 2 and 3, in an application of the invention to the electronic in-line payment in the case of a subscriber service;

- following the session-opening operation, not shown, between the user terminal 100 and the information server 103,

- in the course of operation 800, the information server 103 attributes a unique secret session numeral;

- in the course of an operation 801, the information server 103 receives from the user terminal 100, an identification;

- in the course of an operation 802, the user of the user terminal 101 selects goods or services of which he wishes to have the benefit, then starts a payment procedure (see above with respect to Figure 4);

- in the course of operation 803, the data server 105 receives the payment request from the user terminal 100;

- in the course of operation 805, the data server 105 carries out, preferably in a secure manner, a request for bank authorization to the server 106 from a bank at which the user has an account with which is associated the payment card involved in the operation 804. It supplies the amount of the

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
25100
25101
25102
25103
25104
25105
25106
25107
25108
25109
25110
25111
25112
25113
25114
25115
25116
25117
25118
25119
25120
25121
25122
25123
25124
25125
25126
25127
25128
25129
25130
25131
25132
25133
25134
25135
25136
25137
25138
25139
25140
25141
25142
25143
25144
25145
25146
25147
25148
25149
25150
25151
25152
25153
25154
25155
25156
25157
25158
25159
25160
25161
25162
25163
25164
25165
25166
25167
25168
25169
25170
25171
25172
25173
25174
25175
25176
25177
25178
25179
25180
25181
25182
25183
25184
25185
25186
25187
25188
25189
25190
25191
25192
25193
25194
25195
25196
25197
25198
25199
25200
25201
25202
25203
25204
25205
25206
25207
25208
25209
25210
25211
25212
25213
25214
25215
25216
25217
25218
25219
25220
25221
25222
25223
25224
25225
25226
25227
25228
25229
25230
25231
25232
25233
25234
25235
25236
25237
25238
25239
25240
25241
25242
25243
25244
25245
25246
25247
25248
25249
25250
25251
25252
25253
25254
25255
25256
25257
25258
25259
25260
25261
25262
25263
25264
25265
25266
25267
25268
25269
25270
25271
25272
25273
25274
25275
25276
25277
25278
25279
25280
25281
25282
25283
25284
25285
25286
25287
25288
25289
25290
25291
25292
25293
25294
25295
25296
25297
25298
25299
252100
252101
252102
252103
252104
252105
252106
252107
252108
252109
252110
252111
252112
252113
252114
252115
252116
252117
252118
252119
252120
252121
252122
252123
252124
252125
252126
252127
252128
252129
252130
252131
252132
252133
252134
252135
252136
252137
252138
252139
252140
252141
252142
252143
252144
252145
252146
252147
252148
252149
252150
252151
252152
252153
252154
252155
252156
252157
252158
252159
252160
252161
252162
252163
252164
252165
252166
252167
252168
252169
252170
252171
252172
252173
252174
252175
252176
252177
252178
252179
252180
252181
252182
252183
252184
252185
252186
252187
252188
252189
252190
252191
252192
252193
252194
252195
252196
252197
252198
252199
252200
252201
252202
252203
252204
252205
252206
252207
252208
252209
252210
252211
252212
252213
252214
252215
252216
252217
252218
252219
252220
252221
252222
252223
252224
252225
252226
252227
252228
252229
252230
252231
252232
252233
252234
252235
252236
252237
252238
252239
252240
252241
252242
252243
252244
252245
252246
252247
252248
252249
252250
252251
252252
252253
252254
252255
252256
252257
252258
252259
252260
252261
252262
252263
252264
252265
252266
252267
252268
252269
252270
252271
252272
252273
252274
252275
252276
252277
252278
252279
252280
252281
252282
252283
252284
252285
252286
252287
252288
252289
252290
252291
252292
252293
252294
252295
252296
252297
252298
252299
252300
252301
252302
252303
252304
252305
252306
252307
252308
252309
252310
252311
252312
252313
252314
252315
252316
252317
252318
252319
252320
252321
252322
252323
252324
252325
252326
252327
252328
252329
252330
252331
252332
252333
252334
252335
252336
252337
252338
252339
252340
252341
252342
252343
252344
252345
252346
252347
252348
252349
252350
252351
252352
252353
252354
252355
252356
252357
252358
252359
252360
252361
252362
252363
252364
252365
252366
252367
252368
252369
252370
252371
252372
252373
252374
252375
252376
252377
252378
252379
252380
252381
252382
252383
252384
252385
252386
252387
252388
252389
252390
252391
252392
252393
252394
252395
252396
252397
252398
252399
252400
252401
252402
252403
252404
252405
252406
252407
252408
252409
252410
252411
252412
252413
252414
252415
252416
252417
252418
252419
252420
252421
252422
252423
252424
252425
252426
252427
252428
252429
252430
252431
252432
252433
252434
252435
252436
252437
252438
252439
252440
252441
252442
252443
252444
252445
252446
252447
252448
252449
252450
252451
252452
252453
252454
252455
252456
252457
252458
252459
252460
252461
252462
252463
252464
252465
252466
252467
252468
252469
252470
252471
252472
252473
252474
252475
252476
252477
252478
252479
252480
252481
252482
252483
252484
252485
252486
252487
252488
252489
252490
252491
252492
252493
252494
252495
252496
252497
252498
252499
252500
252501
252502
252503
252504
252505
252506
252507
252508
252509
252510
252511
252512
252513
252514
252515
252516
252517
252518
252519
252520
252521
252522
252523
252524
252525
252526
252527
252528
252529
252530
252531
252532
252533
252534
252535
252536
252537
252538
252539
252540
252541
252542
252543
252544
252545
252546
252547
252548
252549
252550
252551
252552
252553
252554
252555
252556
252557
252558
252559
252560
252561
252562
252563
252564
252565
252566
252567
252568
252569
252570
252571
252572
252573
252574
252575
252576
252577
252578
252579
252580
252581
252582
252583
252584
252585
252586
252587
252588
252589
252590
252591
252592
252593
252594
252595
252596
252597
252598
252599
252600
252601
252602
252603
252604
252605
252606
252607
252608
252609
252610
252611
252612
252613
252614
252615
252616
252617
252618
252619
252620
252621
252622
252623
252624
252625
252626
252627
252628
252629
252630
252631
252632
252633
252634
252635
252636
252637
252638
252639
252640
252641
252642
252643
252644
252645
252646
252647
252648
252649
252650
252651
252652
252653
252654
252655
252656
252657
252658
252659
252660
252661
252662
252663
252664
252665
252666
252667
252668
252669
252670
252671
252672
252673
252674
252675
252676
252677
252678
252679
252680
252681
252682
252683
252684
252685
252686
252687
252688
252689
252690
252691
252692
252693
252694
252695
252696
252697
252698
252699
252700
252701
252702
252703
252704
252705
252706
252707
252708
252709
252710
252711
252712
252713
252714
252715
252716
252717
252718
252719
252720
252721
252722
252723
252724
252725
252726
252727
252728
252729
252730
252731
252732
252733
252734
252735
252736
252737
252738
252739
252740
252741
252742
252743
252744
252745
252746
252747
252748
252749
252750
252751
252752
252753
252754
252755
252756
252757
252758
252759
252760
252761
252762
252763
252764
252765
252766
252767
252768
252769
252770
252771
252772
252773
252774
252775
252776
252777
252778
252779
252780
252781
252782
252783
252784
252785
252786
252787
252788
252789
252790
252791
252792
252793
252794
252795
252796
252797
252798
252799
252800
252801
252802
252803
252804
252805
252806
252807
252808
252809
252810
252811
252812
252813
252814
252815
252816
252817
252818
252819
252820
252821
252822
252823
252824
252825
252826
252827
252828
252829
252830
252831
252832
252833
252834
252835
252836
252837
252838
252839
252840
252841
252842
252843
252844
252845
252846
252847
252848
252849
252850
252851
252852
252853
252854
252855
252856
252857
252858
252859
252860
252861
252862
252863
252864
252865
252866
252867
252868
252869
252870
252871
252872
252873
252874
252875
252876
252877
252878
252879
252880
252881
252882
252883
252884
252885
252886
252887
252888
252889
252890
252891
252892
252893
252894
252895
252896
252897
252898
252899
252900
252901
252902
252903
252904
252905
252906
252907
252908
252909
252910
252911
252912
252913
252914
252915
252916
252917
252918
252919
252920
252921
252922
252923
252924
252925
252926
252927
252928
252929
252930
252931
252932
252933
252934
252935
252936
252937
252938
252939
252940
252941
252942
252943
252944
252945
252946
252947
252948
252949
252950
252951
252952
252953
252954
252955
252956
252957
252958
252959
252960
252961
252962
252963
252964
252965
252966
252967
252968
252969
252970
252971
252972
252973
252974
252975
252976
252977
252978
252979
252980
252981
252982
252983
252984
252985
252986
252987
252988
252989
252990
252991
252992
252993
252994
252995
252996
252997
252998
252999
252100
252101
252102
252103
252104
252105
252106
252107
252108
252109
252110
252111
252112
252113
252114
252115
252116
252117
252118
252119
2521100
2521101
2521102
2521103
2521104
2521105
2521106
2521107
2521108
2521109
2521110
2521111
2521112
2521113
2521114
2521115
2521116
2521117
2521118
2521119
25211100
25211101
25211102
25211103
25211104
25211105
25211106
25211107
25211108
25211109
25211110
25211111
25211112
25211113
25211114
25211115
25211116
25211117
25211118
25211119
252111100
252111101
252111102
252111103
252111104
252111105
252111106
252111107
252111108
252111109
252111110
252111111
252111112
252111113
252111114
252111115
252111116
252111117
252111118
2521111

transaction envisaged to the bank server 806 as well as the data concerning the payment card, these data being preserved by the information server 103 on the account of the user of the service in question. The information server 103 receives, in return, from the bank server 806, a payment authorization, according to the bank modalities which depend on the amount available in the bank account in question and on the possible authorization of debiting said account;

- in the course of an operation 807, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identification transmitted by the information server 103 to the message server 109, in the course of operation 801;

- in the course of operation 808, the information server 103 computes confidential information also called "certificate of transaction" (see Figure 7);

- in the course of operation 809, the confidential information, also called "certificate of transaction" is supplied to the user, conjointly with the amount of the transaction, in clear, either by being displayed on the display of the receiver 111, or by being given in an oral or telecopied manner, which permits the control of the integrity of the transaction by the user;

- in the course of operation 810, the user supplies to the information server 103, which itself retransmits it to the data server 105, a confidential message identical to or as

a modification, representative of, the confidential information constituted by the certificate of transaction, by means of the keyboard of the user terminal 100;

5 - in the course of operation 811, the information server 103 receives this confidential message;

10 - in the course of test 812, the data server 105 determines whether this confidential message is representative of confidential information generated by the data server 105, in the course of operation 808, or not;

15 - when the result of test 812 is positive, the data server 105 validates the payment carried out, this payment being then effectively carried out between the bank entities according to known techniques, then resumes the operation of presenting commercial offers;

20 - when the result of test 812 is negative, the data server 105 transmits to the user an error message and invalidation of the payment, by stating if desired a cause of failure (too much time elapsed between the transmission of confidential information and its reception, ...) and the payment is not carried out.

Finally, the end of the session is of known type.

As a modification of the embodiment shown in Figure 8, the operation 805 is carried out after all the other operations, but before the end of the session.

25 In Figure 9, there is seen a sequence of operations carried out by the elements shown in Figures 2 and 3, in an

application of the invention to the payment with an electronic payment terminal:

- in the course of operation 915, the user introduces his payment card into an electronic payment terminal ("EPT") which constitutes the so-called "user" terminal;

- in the course of operation 916, the merchant acquires the amount of the transaction on said EPT;

- in the course of operation 900, an opening of the session is carried out between the EPT 100, and the information server 103 and a unique and secret session numeral is attributed by the communication server 103;

- in the course of operation 901, the information server 103 receives from the EPT 100, information carried by the payment card as well as the amount of the transaction in progress, and the information server transmits a demand for identification of the customer at the bank entity 906 and receives this information by return;

- in the course of operation 907, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identification transmitted in the course of operation 901;

- in the course of operation 908, the information server 103 computes confidential information also called "certificate of transaction" (see Figure 7);

- in the course of operation 909, the confidential information, also called "certificate of transaction" is

supplied to the user, conjointly with the amount of the transaction, in clear, either by being displayed on the display of the receiver 111, or by being given orally, which permits the control of the integrity of the transaction by the user;

- in the course of operation 910, the user supplies to the information server 103, which itself retransmits it to the data server 105, a unique confidential message with, or as a modification, representative of, the confidential information constituted by the certificate of transaction, by means of the keyboard of the EPT 100;

- in the course of operation 911, the information server 103 receives this confidential message;

- in the course of test 912, the data server 105 determines whether this confidential message is representative of the confidential information generated by the data server 105, in the course of operation 908, or not;

- when the result of test 912 is positive, the data server 105 validates the payment carried out, this payment being then carried out between the bank entities according to known techniques;

- when the result of test 912 is negative, the data server 105 transmits to the user an error message and invalidation of the payment, by stating if desired the cause of failure (too much time elapsed between the transmission of

confidential information and its reception, ...) and the payment is not effectuated.

A modification of operation 916 is the acquisition by the user of his personal code also called "PIN" (acronym of "Personal Identification Number"), before starting operation 900.

Finally, the end of the session is of known type and the client recovers his payment card as well as a printed ticket bearing the amount of the payment carried out.

In Figure 10, there is seen a sequence of operations performed by the elements shown in Figures 2 and 3, in an application of the invention to the electronic in-line payment, using a trustee, in the case of a service without a subscription, a different application from that shown in Figure 7.

In this application, the data server 105 is preferably located with the message server 109, and forms a portion with the latter of the trustee (also called the certifier). By way of example, these two services 105 and 109 are located with the telecommunication operator.

In this application, the operations used are carried out successively in the following manner.

Following a session-opening operation, not shown, between the user terminal 100 and the information server 103, in the course of an operation 1000, the information server 103 attributes a secret unique session numeral. In the course of

operation 1001, the user of the user terminal 101 selects goods or services which he desires to purchase, then initiates a payment procedure, in cooperation with the information server 103.

5 The information server 103 thus receives, in the course of an operation 1032, a payment request, and, in particular, an amount of the transaction envisaged.

10 In the course of an operation 1003, the user of the user terminal 101 supplies an identification and, in the course of an operation 1004, the information server 103 receives this identification from the user terminal 100.

15 In the course of an operation 1005, the information server 103 transmits a payment request as well as the identification of the user and the amount of the transaction envisaged, to the data server 105, by means of the telecommunication line 106. In the course of a test 1006, the data server 105 determines whether the amount of the transaction envisaged is greater than a predetermined amount.

20 When the result of test 1006 is negative, an operation 1008 is carried out (see below).

25 When the result of test 1006 is positive, a data server 105 searches, in the course of an operation 1007, in its database of subscribers, the number of the bank card corresponding to the identification transmitted and carries out a request for bank authorization to a server of a bank

where the user has the account with which is connected this payment card.

In the course of a test 1009, the server of the bank determines, according to rules known per se, whether the transaction envisaged is authorized or not. When the result of the test 1009 is negative, a refusal is indicated to the user, in the course of an operation (not shown), by means of the information server 103 and the user terminal 101.

When the result of the test 1009 is positive, the data server 105 receives, in the course of operation 1008, from the bank server, a payment authorization, according to known bank procedures.

In the course of operation 1008, the unique address of the receiver 111 is determined: it is representative, in the database 107, of the identification transmitted by the information server 103 to the message server 109, in the course of operation 1001.

Then, the operations 708 and the following illustrated in Figure 7, are carried out.

However, in the embodiment shown in Figure 10, when the result of the test 712 is positive, the data server 105 validates the payment carried out, then returns a payment approval to the server 103, accompanied by the address of the subscriber to the telephone service (at the end of the telephonic computation period of the trustee, this payment being effectively carried out between the bank entities of the

purchaser and the trustee, according to known techniques. The same is true at the end of the payment period, the trustee carries out the payment to the merchant and subtracts as the case may be the service charge), then resumes the operation of presenting commercial offers.

In return, when the result of the test 712 is negative, the data server 105 transmits to the user an error message and invalidation of the payment, stating as the case may be a cause of a failure (too much time elapsed between the transmission of confidential information and its reception, ...) and the payment is not carried out.

Finally, the end of the session is of known type.

In Figure 11, there is seen a diagram of the payment system according to the present invention using payment protocols known as "SET" (acronym of "Secure Electronic Transaction"). So as better to understand this type of transaction, the reader should refer to version 1.0 of the specifications of the SET protocol, published May 31, 1997. This version is incorporated here by reference.

It will be recalled that the VISA (trademark) and MASTERCARD (trademark) enterprises are associated with each other to define a common standard of payment by bank cards through open networks: the SET protocol.

The principal objectives of this SET protocol are as follows:

- to render easy and rapid the development of electronic commerce,

- to create confidence in the network between the purchaser and the seller by means of an exchange of certificates,

- to separate the Internet network from the bank network,

- to guarantee the integrity and confidentiality of the transactions thanks to the encoding of the messages,

- to ensure interoperability between open bank standard and non-proprietary solutions,

- to carry out already existing standards.

The principles and operation of the SET protocol rely on three important principles:

- the Payment Gateway, which ensures that the Internet domain will be sealed off from the bank domain,

- the certificates which are public keys which serve to authenticate the different actors entering into the transaction (client-bearer, merchant, Payment Gateway),

- the trustee who certifies the public keys which then become certificates.

The whole of the SET system rests on the use of certificates. The trustee certifies the public keys of the client-bearers, of the merchants and the Payment Gateway. The trustee is itself the object of a certification. There is thus a cascade system, wherein a trustee at a higher level

certifies a trustee at a lower level. This system is hierarchical and, at the summit, is located the supreme authority which is known by all and which does not to be authenticated. The interest in such a hierarchy is to delegate the work of certification, whilst guaranteeing the whole of the system.

1) For his enlistment, the client obtains his key by using a specific software which will be integrated into the navigator, known to those in the art under the name of "browser". He enters his bank card number into the program. The latter gives a receipt which the client must carry to one of the VISA or MASTERCARD enterprises, the latter returning a certificate containing a key which will remain inscribed in the software stored at the client station.

2) For the transaction:

- the bearer consults the catalog on the server and makes his choice. The merchant server then sends to the client a virtual order (Order Information "OI") which contains the information on the product and the amount, as well as the certificate and public key of the merchant and of the Payment Gateway;

- the client sends to the merchant server his certificate and his public key. Therefore, having each other's certificate, they can proceed to their mutual identification;

25 - the client then creates a PI (acronym of "Payment Information"). This PI contains information relative to the

bank system, which is sent exclusively to the Payment Gateway. For this reason, the client numbers the PI with the public key of the Payment Gateway. This operation concluded, the client assembles the OI and the PI and signs the whole with his private key. This package is sent to the merchant server.

- the merchant server is able to verify the validity of the package from the public key of the client. He can thus be sure that the client has not modified the OI. However, it is impossible for him to read the information of the PI. The commercial server signs in his turn, the package received and transmits it to the Payment Gateway. The order information emitted by the merchant server and the payment order emitted by the bearer are connected in an inseparable manner by means of this dual signature.

- the Payment Gateway verifies the certificates, the dual signature and the agreement between the order information (OI) and the payment order (PI). It thus serves as an interface with the traditional world of card payment.

If the usual conditions of card payment are fulfilled, it confirms the transaction to the merchant server.

The advantage of this protocol is that, thanks to the certificates, the client and the merchant server can mutually identify themselves before even carrying out the transaction.

The drawbacks of these protocols are:

- the multiplication of the trustees is difficult to manage,

- protection is only by software,
- the certificates are stored on machines of the client's. Hence, strictly speaking, the authentication does not concern the client but rather his computer.

With respect to Figure 11, there will be seen practice of the invention in the framework of the payment solution SET. This protocol uses a tripartite relationship, client computer 1101 - merchant server 1102 - Payment Gateway 1103. Each of these entities receives SET certificates generated by a certification manager (not shown). At the date of filing the present application, the SET protocol does not permit reliable authentication of the purchaser, except by installing a memory card reader.

In a first instance, a client institutes the purchase by selecting goods or services on a commercial site of a computer network. The client then triggers the payment by validating the purchase (for example by clicking on a "purchase validation" icon).

Then the client must type in a static password to initiate payment, by decoding the SET certificate stored on his computer.

According to a variation (not shown), an operative mode consists in not using a certificate (according to the SET protocol operating in "2 Kp" mode). In this case, no certifi-

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
25100
25101
25102
25103
25104
25105
25106
25107
25108
25109
25110
25111
25112
25113
25114
25115
25116
25117
25118
25119
25120
25121
25122
25123
25124
25125
25126
25127
25128
25129
25130
25131
25132
25133
25134
25135
25136
25137
25138
25139
25140
25141
25142
25143
25144
25145
25146
25147
25148
25149
25150
25151
25152
25153
25154
25155
25156
25157
25158
25159
25160
25161
25162
25163
25164
25165
25166
25167
25168
25169
25170
25171
25172
25173
25174
25175
25176
25177
25178
25179
25180
25181
25182
25183
25184
25185
25186
25187
25188
25189
25190
25191
25192
25193
25194
25195
25196
25197
25198
25199
25200
25201
25202
25203
25204
25205
25206
25207
25208
25209
25210
25211
25212
25213
25214
25215
25216
25217
25218
25219
25220
25221
25222
25223
25224
25225
25226
25227
25228
25229
25230
25231
25232
25233
25234
25235
25236
25237
25238
25239
25240
25241
25242
25243
25244
25245
25246
25247
25248
25249
25250
25251
25252
25253
25254
25255
25256
25257
25258
25259
25260
25261
25262
25263
25264
25265
25266
25267
25268
25269
25270
25271
25272
25273
25274
25275
25276
25277
25278
25279
25280
25281
25282
25283
25284
25285
25286
25287
25288
25289
25290
25291
25292
25293
25294
25295
25296
25297
25298
25299
25300
25301
25302
25303
25304
25305
25306
25307
25308
25309
25310
25311
25312
25313
25314
25315
25316
25317
25318
25319
25320
25321
25322
25323
25324
25325
25326
25327
25328
25329
25330
25331
25332
25333
25334
25335
25336
25337
25338
25339
25340
25341
25342
25343
25344
25345
25346
25347
25348
25349
25350
25351
25352
25353
25354
25355
25356
25357
25358
25359
25360
25361
25362
25363
25364
25365
25366
25367
25368
25369
25370
25371
25372
25373
25374
25375
25376
25377
25378
25379
25380
25381
25382
25383
25384
25385
25386
25387
25388
25389
25390
25391
25392
25393
25394
25395
25396
25397
25398
25399
25400
25401
25402
25403
25404
25405
25406
25407
25408
25409
25410
25411
25412
25413
25414
25415
25416
25417
25418
25419
25420
25421
25422
25423
25424
25425
25426
25427
25428
25429
25430
25431
25432
25433
25434
25435
25436
25437
25438
25439
25440
25441
25442
25443
25444
25445
25446
25447
25448
25449
25450
25451
25452
25453
25454
25455
25456
25457
25458
25459
25460
25461
25462
25463
25464
25465
25466
25467
25468
25469
25470
25471
25472
25473
25474
25475
25476
25477
25478
25479
25480
25481
25482
25483
25484
25485
25486
25487
25488
25489
25490
25491
25492
25493
25494
25495
25496
25497
25498
25499
25500
25501
25502
25503
25504
25505
25506
25507
25508
25509
25510
25511
25512
25513
25514
25515
25516
25517
25518
25519
25520
25521
25522
25523
25524
25525
25526
25527
25528
25529
25530
25531
25532
25533
25534
25535
25536
25537
25538
25539
25540
25541
25542
25543
25544
25545
25546
25547
25548
25549
25550
25551
25552
25553
25554
25555
25556
25557
25558
25559
25560
25561
25562
25563
25564
25565
25566
25567
25568
25569
25570
25571
25572
25573
25574
25575
25576
25577
25578
25579
25580
25581
25582
25583
25584
25585
25586
25587
25588
25589
25590
25591
25592
25593
25594
25595
25596
25597
25598
25599
25600
25601
25602
25603
25604
25605
25606
25607
25608
25609
25610
25611
25612
25613
25614
25615
25616
25617
25618
25619
25620
25621
25622
25623
25624
25625
25626
25627
25628
25629
25630
25631
25632
25633
25634
25635
25636
25637
25638
25639
25640
25641
25642
25643
25644
25645
25646
25647
25648
25649
25650
25651
25652
25653
25654
25655
25656
25657
25658
25659
25660
25661
25662
25663
25664
25665
25666
25667
25668
25669
25670
25671
25672
25673
25674
25675
25676
25677
25678
25679
25680
25681
25682
25683
25684
25685
25686
25687
25688
25689
25690
25691
25692
25693
25694
25695
25696
25697
25698
25699
25700
25701
25702
25703
25704
25705
25706
25707
25708
25709
25710
25711
25712
25713
25714
25715
25716
25717
25718
25719
25720
25721
25722
25723
25724
25725
25726
25727
25728
25729
25730
25731
25732
25733
25734
25735
25736
25737
25738
25739
25740
25741
25742
25743
25744
25745
25746
25747
25748
25749
25750
25751
25752
25753
25754
25755
25756
25757
25758
25759
25760
25761
25762
25763
25764
25765
25766
25767
25768
25769
25770
25771
25772
25773
25774
25775
25776
25777
25778
25779
25780
25781
25782
25783
25784
25785
25786
25787
25788
25789
25790
25791
25792
25793
25794
25795
25796
25797
25798
25799
25800
25801
25802
25803
25804
25805
25806
25807
25808
25809
25810
25811
25812
25813
25814
25815
25816
25817
25818
25819
25820
25821
25822
25823
25824
25825
25826
25827
25828
25829
25830
25831
25832
25833
25834
25835
25836
25837
25838
25839
25840
25841
25842
25843
25844
25845
25846
25847
25848
25849
25850
25851
25852
25853
25854
25855
25856
25857
25858
25859
25860
25861
25862
25863
25864
25865
25866
25867
25868
25869
25870
25871
25872
25873
25874
25875
25876
25877
25878
25879
25880
25881
25882
25883
25884
25885
25886
25887
25888
25889
25890
25891
25892
25893
25894
25895
25896
25897
25898
25899
25900
25901
25902
25903
25904
25905
25906
25907
25908
25909
25910
25911
25912
25913
25914
25915
25916
25917
25918
25919
25920
25921
25922
25923
25924
25925
25926
25927
25928
25929
25930
25931
25932
25933
25934
25935
25936
25937
25938
25939
25940
25941
25942
25943
25944
25945
25946
25947
25948
25949
25950
25951
25952
25953
25954
25955
25956
25957
25958
25959
25960
25961
25962
25963
25964
25965
25966
25967
25968
25969
25970
25971
25972
25973
25974
25975
25976
25977
25978
25979
25980
25981
25982
25983
25984
25985
25986
25987
25988
25989
25990
25991
25992
25993
25994
25995
25996
25997
25998
25999
25100
25101
25102
25103
25104
25105
25106
25107
25108
25109
25110
25111
25112
25113
25114
25115
25116
25117
25118
25119
25120
25121
25122
25123
25124
25125
25126
25127
25128
25129
25130
25131
25132
25133
25134
25135
25136
25137
25138
25139
25140
25141
25142
25143
25144
25145
25146
25147
25148
25149
25150
25151
25152
25153
25154
25155
25156
25157
25158
25159
25160
25161
25162
25163
25164
25165
25166
25167
25168
25169
25170
25171
25172
25173
25174
25175
25176
25177
25178
25179
25180
25181
25182
25183
25184
25185
25186
25187
25188
25189
25190
25191
25192
25193
25194
25195
25196
25197
25198
25199
25200
25201
25202
25203
25204
25205
25206
25207
25208
25209
25210
25211
25212
25213
25214
25215
25216
25217
25218
25219
25220
25221
25222
25223
25224
25225
25226
25227
25228
25229
25230
25231
25232
25233
25234
25235
25236
25237
25238
25239
25240
25241
25242
25243
25244
25245
25246
25247
25248
25249
25250
25251
25252
25253
25254
25255
25256
25257
25258
25259
25260
25261
25262
25263
25264
25265
25266
25267
25268
25269
25270
25271
25272
25273
25274
25275
25276
25277
25278
25279
25280
25281
25282
25283
25284
25285
25286
25287
25288
25289
25290
25291
25292
25293
25294
25295
25296
25297
25298
25299
252100
252101
252102
252103
252104
252105
252106
252107
252108
252109
252110
252111
252112
252113
252114
252115
252116
252117
252118
252119
252120
252121
252122
252123
252124
252125
252126
252127
252128
252129
252130
252131
252132
252133
252134
252135
252136
252137
252138
252139
252140
252141
252142
252143
252144
252145
252146
252147
252148
252149
252150
252151
252152
252153
252154
252155
252156
252157
252158
252159
252160
252161
252162
252163
252164
252165
252166
252167
252168
252169
252170
252171
252172
252173
252174
252175
252176
252177
252178
252179
252180
252181
252182
252183
252184
252185
252186
252187
252188
252189
252190
252191
252192
252193
252194
252195
252196
252197
252198
252199
252200
252201
252202
252203
252204
252205
252206
252207
252208
252209
252210
252211
252212
252213
252214
252215
252216
252217
252218
252219
252220
252221
252222
252223
252224
252225
252226
252227
252228
252229
252230
252231
252232
252233
252234
252235
252236
252237
252238
252239
252240
252241
252242
252243
252244
252245
252246
252247
252248
252249
252250
252251
252252
252253
252254
252255
252256
252257
252258
252259
252260
252261
252262
252263
252264
252265
252266
252267
252268
252269
252270
252271
252272
252273
252274
252275
252276
252277
252278
252279
252280
252281
252282
252283
252284
252285
252286
252287
252288
252289
252290
252291
252292
252293
252294
252295
252296
252297
252298
252299
252300
252301
252302
252303
252304
252305
252306
252307
252308
252309
252310
252311
252312
252313
252314
252315
252316
252317
252318
252319
252320
25232

cate is exchanged and only authentification of the client is necessary, according to the present invention (below).

The exchanges "client computer - shopping server - Payment Gateway" are initiated so as to determine the parameters of communication (frames called "*PWakeUp*", "*PInitReq*" and "*PInitRes*" in the specification of the SET protocol), the data contained in the client's certificate are recovered at the level of the Payment Gateway (frame *Preq(PAN)*) which decode them and address an authentication request of the client to the authentication server 1104.

This server authenticates the transaction by computing an authentication code of the transaction ("CAT") and sends it, by means of a short message (known to those in the art as "SMS", acronym for "Short Message System") to the client identified by his corresponding mobile phone number 1105, in the subscriber database, to the identification decoded in the SET client certificate which is received by the Payment Gateway.

According to a modification (not shown), the telephone number of the subscriber, on the second network, is included, coded, in a field of the SET client certificate. In this case, it is not necessary to have a database carrying out the correspondence between the mobile number of the subscriber and his identification. Upon reception of the client certificate on the Payment Gateway, the latter decodes the certificate and uses directly the number of the mobile phone con-

10
15
20

25

tained in the certificate to address the authentication code of the transaction of the client. This principle of operation facilitates the interoperability between the telecommunication and bank operators.

5 The client then receives an authentication code of the transaction in the form of a confidential message, according to the present invention. He acquires this message on his computer in an authentication field provided for this purpose.

10 The authentication code of the transaction is then sent either by means of the shopping server, directly to the Payment Gateway, or is submitted to the authentication server which validates it and decodes the payment.

15 According to a modification (not shown), the client receives in the form of a short SMS message the amount of the transaction in clear, associated with the identification code of the transaction so that he verifies the integrity of the amount of his purchase.

20 In Figure 12, there is seen the use of the invention in the field of the solution of payments known to those in the art as Globeld (trademark) or Kleline (trademark).

25 This system relies on the principle of virtual money-carrier (VMC). It thus is a matter of having the client first deposit and then be debited according to his purchases. The transactions are totally transparent to the client. This

is the only case in which the client and shopping server have no direct relationship.

The use the Globeld system, it suffices to telecharge an interface (called "Klebox", trademark of Kleline) and to open an account addressing it to GlobeOnLine (trademark) or Kleline. The client can open several virtual money-carriers.

Opening the virtual money-carriers can take place instantaneously on-line. In this case, the bank coordinates are encoded (RSA technology) and sent by means of the Internet network. They can also be transmitted by telephone, telecopy or mail. In response, the service using this solution attributes to the client a money-carrier number and a confidential code.

Upon opening the virtual money-carrier, the client carries out two operations: he gives his bank card number and the other necessary information, then pays, on the virtual money-carrier, an amount of his choice. The client can consult the condition of his virtual money-carrier and deposit new sums of money at any time. It is also possible for him to withdraw all or part of what he has.

The virtual money-carrier is connected to one or several bank cards. The client has the possibility of personalizing his bank cards, by giving them names, so as not to confuse them. Double-checking techniques ensure that a card corresponds only to a single person.

The transaction type takes place as follows:

- the client browses on the shopping server. When a product interests him, he clicks above and declares himself ready to purchase by sending a purchase order to the shopping server;

- the latter emits a receipt with a destination to the Globeld server. This receipt comprises on the one hand, the nature and amount of the purchase and, on the other hand, the number of the virtual money-carrier of the merchant. It is all signed from the confidential code of this latter. Then, Globeld verifies this ticket (the shopping server is thus authenticated) and this fact appears on the screen of the computer of the client;

- the client electronically signs this ticket with his secret code and returns it to Globeld;

- Globeld then authenticates the client with his public key and validates the transaction. If the client has decided to pay with his card, the validation takes place at the bank network with, if desired, a request for authorization to the bank card network. If the client uses his virtual money-carrier, the latter is debited with the amount of the transaction;

- the client's computer finally emits a cash voucher to the shopping server (validating the transaction) which then sends the merchandise.

All the communications in the transactions are coded with the help of asymmetric keys of 512 bits.

The drawbacks of this protocol are that, for the merchant, it is necessary to have a virtual money-carrying number and a confidential code.

With regard to Figure 12, it will be noted that, in a particular embodiment of the present invention, used in combination with the Globeld solution:

1. The client computer 1201 selects goods and services on the shopping site 1202 and validates its purchase.
2. The shopping server then requires a "ticket" (receipt) from the client computer ("GRT1" exchange in Figure 12).
3. The client computer submits, in its turn, this request to the intermediation server 1203 ("GRT2").
4. The authentication phase is then used ("CAC/CAR" exchange) with a dynamic code called "TID" (for "Transcode Identifier") generated by the intermediation server and sent by means of a telecommunication network, in the form of a short SMS message, addressed to the mobile phone 1204 whose number corresponds to the subscriber identified by the "userId" identification of the client, stored in the database 1206 of the authentication server 1205.

According to a modification (not shown), the TID dynamic code is calculated and sent directly by the telecommunication operator. In this case, the intermediary server

10
11
12
13
14
15
16
17
18
19
20

20

25

transmits the information necessary for calculating the TID dynamic code, to the telecommunication operator.

According to another modification (not shown), the client receives, in the form of a short SMS message, the amount of the transaction, in clear, associated with the authentication code of the transaction so that he can verify the integrity of the amount of his purchase.

5. The transaction authentication code received by the mobile phone of the client is acquired on the computer used by the client and the information as to the transaction are added to the TID dynamic code and are sent to the intermediary server ("IS") which verifies the validity of the TID dynamic code and validates, with the authentication server, the transaction authentication code received from the client's computer.

6. The intermediary server thus delivers a receipt ("GPT 3" exchange) to the client's computer, which then sends it to the shopping server ("GPT 4" exchange).

The "SSL" (Secure Socket Level) protocol is a secured communication protocol between two entities. The reader can refer to the version 3.0, of the specifications setting forth this protocol, the version of March, 1996. This version is incorporated herein by reference.

The SSL protocol is a protocol developed by NETSCAPE. The initial negotiation phase permits authentication of the shopping server and, optionally, of the client.

Once this phase is concluded, the exchanges are encrypted with the key generated by the client's computer.

Thus, the security protocol SSL encodes the data, authenticates the server and ensures the integrity of the messages for a TCP/IP (Transport Telecommunication Protocol/Internet Protocol") connection:

- . particularly, the encoding of the data (RC4),
 - . the authentication of the shopping server for the client (different methods of asymmetric coding),
 - . the integrity of the data (MD2, MD5),
 - . the non-renounceability of the exchanges, and
 - . optionally, the authentication of the client for the server.

As a practical matter, the SSL protocol gives a security of the "handshake" type, to begin any TCP/IP connection. The handshake permits, for the client's computer and the shopping server, to agree on the level of security to be used and to fulfill the conditions of authentication for the connection. Then, the sole role of the SSL protocol consists in encoding and decoding the flow of octets of the application protocol taking place (for example "HTTP", acronym for "HyperText Transfer Protocol"). This means that all the information contained in the HTTP requests and responses are entirely encoded, including the URL (acronym for universal resolution location) that the client's computer requires, the content of all the submitted formulas (such as the credit card

numbers), any information relative to the HTTP access authorization (names of the user and password) and all the data returned by the server to the client's computer.

SSL certificates can be edited by an entity accredited both by the client and the merchant. In the usual manner, the client does not possess a certificate.

There is seen, in Figure 13, in a particular embodiment of the present invention, in combination with the payment scheme SSL, that:

- the client computer 1301 first initiates the purchase, by selecting its goods or services on the shopping site 1302 or the desired shopping mall;
- the start of payment is activated by a validation of the client's purchase (for example, pushing a "purchase validation" key);
- then the communication SSL opens with an exchange between the client computer 1301 and the shopping server 1302, of frames which permit regulating the parameters of the communication (protocol version, session number, retained algorithm coding, compression method, reciprocal authentication and use or not of algorithm-based coding with public or private keys). A master key is exchanged, encoded, with the private key of the merchant, the client's computer decoding it with the public key of the merchant and then generating a session key based on this master key. This operation is reproduced on the shopping server so as to have, for both

sides, the same session key. Said session key serves to encode the communication between the client's computer and the shopping server;

5 - the client keys in a "UserId" identification permitting identifying it for the shopping server or the shopping mall;

10 - the shopping server or the mall transmits the "UserId" identification and the parameters of the transaction, to the telepayment software 1303 which computes the authentication code of the transaction and sends it, by means of a short SMS message, to the client identified by his mobile phone number 1304 corresponding to this "UserId" identification, in the subscriber base 1305 of the authentication server 1306;

15 A modification consists in using the SSL certificate on the client's computer, particularly by incorporating therein, during its generation by the accreditation server, the mobile number of the user, the bank card number and the limit date for validity of the bank card. During exchanges of
20 the beginning of the SSL connection, the shopping server decodes the information of the client's certificate and particularly the mobile number which serves to send the authentication code of the client transaction. In this modification, it is possible to avoid the subscriber database
25 in the authentication server.

Another modification consists in that the client sends directly the bank card number and the limit of date of the validity of this latter. In this case, the shopping server computes the authentication code of the transaction and recovers the mobile number of the client in the database indexed by bank card number. Then the authentication code of the transaction is sent to the client by means of his mobile phone.

- the client identified by his mobile phone receives the authentication code of the transaction on his mobile phone, then acquires it in the authentication field on his PC screen;

- the authentication code of the transaction is sent by means of the shopping server or the mall, then to the authentication server which thus validates the authentication code of the transaction and triggers payment.

- a modification consists in adding, in addition to the amount of the purchase, the references of the product purchased, the quantities, ..., in clear, with the authentication code of the transaction by sending the short SMS message, during the transmission over the mobile phone of the client.

According to a modification (not shown) of each of the embodiments of the present invention, the shopping server carries out a selection operation of the transmissions which are securitized according to the present invention. In the course of this operation of selection of transmissions, as a

10
15
20
25

20

25

function of predetermined criteria, the transmissions are classified into two groups, one relating to the so-called "to be secured" transmission and the other to the so-called "normal" transmissions. The transmissions "to be secured" are processed as described above, whilst the so-called "normal" transmissions require no more than an operation of transmission over a communication support. The so-called "normal" transmissions are in fact according to the processes known to the prior art.

For example, in the case of the embodiment shown in Figure 10, the operation of selection can be carried out in the course of the operation 1005 or in the course of operation 1008, by taking as selection criteria the amount of the transaction, and by comparing it to a transaction limit amount. The so-called "to be secured" transmissions are thus those with which are associated transaction amounts greater than the limit amount.

The different embodiments of the present invention (authentication, certification or the message and electronic on-line payment) can be combined so as to produce specific applications corresponding to the requirements of the operator of the service.

The invention is particularly applicable:

- to the control of access to a computer site (for the internal security of an enterprise, for teleworking in an enterprise, for access to protected databases ...),

- to the transmission of confidential information to the proper parties (for electronic mail, secured and/or registered telecopies, for the certification estimates or of order information ...).

5 - to the on-line payment (for electronic commerce, for the distribution of information or of software, ...),

- to the certification of messages (for long distance declaration, for home banking, ...),

- to the transmission of personalized commercial propositions (for secured letter boxes, ...),

- to the taking of bets on-line (for lotteries or casinos, race courses, ...),

- to the control and reservation of a television program (for pay-per-view television),

15 - to sending information or to remote charging for software on demand,

- for the on-line reservation of services or

- to opening of virtual electronic account.

Several of these applications are described in detail below, by way of example.

20 For use as access control using the present invention, the network used can be a network known as "Intranet" or a worldwide network known as "Internet". The object of this application of the invention is to be certain that the user is an entitled person.

In this application:

- the user identifies the service,
- he identifies himself by supplying an identification,

5 - he receives, by means of a second communication support (for example portable phone or pager), a single use password,

- he keys this single use password onto the keyboard of his terminal, then

10 - if the authentication is made, he has access to the resource in question (for internal safety of an enterprise, for teleworking ...).

15 For an application for electronic courier transmission or registered telecopying using the present invention, the network used can be a switched network. The objectives of this application of the invention are:

20 - to ensure that the person to whom the secured message is addressed (the "destination"), receives it properly and

25 - to deliver a message certificate to the sender and to the addressee of this secured message.

In this application:

- the user who emits the secured message composes the number of a specialized service for using this application,

25 - he identifies himself by supplying an identification,

- he keys in the coordinates of the destination user (telephone number, preferably portable, address, telecopier, ...), then

5 - he delivers his secured message (oral, written and/or by means of a telecopier).

- he receives, by means of a second communication support (for example a portable telephone or pager), a message certificate,

10 - he keys this message certificate into the keyboard of his terminal, in the first network,

- this message certificate is verified,

15 then the addressed user:

- is informed that a secured message awaits him (this operation is carried out by any known means (telephone, telecopier, courier, pager, electronic courier ...)),

- he composes the number of the specialized service for using this application,

20 - he identifies himself by supplying an identification,

- he receives, by means of a second communication support (for example portable telephone or pager), a message certificate, and

25 - he types this message certificate into the keyboard of his terminal, on the first network,

- this message certificate is verified,

- the destination user of the secured message receives this latter,

- the sending user is informed that the secured message has been retrieved by the destination.

5 The specialized service preserves a record of each of these certificates thus delivered.

For an application to teller declaration (which is to say remote declaration) using the present invention, the first network used can be a worldwide network known as the "Internet". The object of this application of the invention is to permit an immediate official administrative declaration, to deliver a receipt to the user and to be assured of the identity of the declarant.

In this application:

- the user who emits the declaration is connected to an administrative service suitable for this application (see below),

- he identifies himself by supplying an identification,

20 - he carries out said declaration or fills out an administrative form,

- he receives, by means of a second communication support (for example portable telephone or pager), a message certificate, and

25 - he keys this message certificate into the keyboard of his terminal.

For an application of the invention to on-line purchases or payments, using the present invention, the network used is a worldwide network known as the "Internet" and a software used by the user's computer permits encrypting an account number or bank card number (for example with encryption software "SSL" or "SET"). The object of this use of the invention is to be able to pay on-line by authenticating the person who carries out the transaction.

In this application:

- the user contacts a "shopping mall", which is to say an assemblage of merchants supplying goods, services or information,

- he identifies himself by supplying an identification,

- he selects a transaction he wishes to carry out,

- he indicates a payment mode (bank card, for example),

- he sends to the server of the mall his card number and the date of expiration of this card, under the encryption protocol SSL,

- the server generates a transaction certificate to which it associates the amount of the transaction, in clear,

- the user receives, by means of a second communication support (for example a portable telephone or pager), this transaction certificate and the amount of the transaction in clear,

10
15
20
25

20

25

- he verifies the integrity of the amount,
- he keys these elements into the keyboard of his
terminal, and

5 - the transaction is then carried out according to
known banking procedures.

For an application using the present invention in which the information (text, images, graphics, sounds) and/or the software, are supplied on demand, the network used is the worldwide network known as the "Internet". The object of this application of the invention is to cause the person who has access to a value-added resource to pay for it and to give him the required service (transmission of information or software) in real time.

In this application,
10 the user contacts the service supplier,
- he identifies himself by supplying an identifica-

tion,
- he chooses information or software which interests
him,

20 - the service supplier indicates the price of the
service in question,

- the user confirms his desire to purchase it,
- the user receives, by means of a second communica-
25 tion support (for example portable telephone or pager), a
certificate of the corresponding transaction, of the amount of
the transaction, in clear, and

- he verifies the integrity of the payment,
- he keys the certificate of transaction into the keyboard of his terminal,

5 - the transaction certificate is verified,
- he receives the information or software in question, and

- he is billed on the monthly bill of his telecommunication service operator, or by his supplier of access to the network, for example, as a function of his use.

For remote betting using the present invention, the network used is the worldwide network known as the "Internet". The object of this application of the invention is to make sure that the person remotely betting is entitled to do so and that he has first done the necessary to place this bet.

15 In this application:

- the user opens and deposits in his account with the service operator, either by depositing a sum in the account from any sales point or by check, or by using the same method as in the applications of the invention recited above for on-line payment,

20 - then, when the user wishes to take part in a game or place a bet:

- he identifies himself by supplying an identification, and/or a subscriber number,

25 - he selects a game in which he desires to play,

- the user receives, by means of a second communication support (for example portable telephone or pager), a certificate of the associated transaction of the bet, in clear, and

- 5 - he verifies the play and the bet.
- he keys the transaction certificate into the keyboard of his terminal,

- the transaction certificate is verified (game, bet, numbers, a combination).

10 For an application in supplying personalized offers using the present invention, the network used is the worldwide network known as the "Internet". The object of this application is to identify the requirements of the consumer upstream in advance of the purchase and to give him personalized offers corresponding to his requirements.

15 In this application, during its first connection:
- the customer gets in touch with the service,
- he identifies himself by supplying an identification and/or a subscriber number,

20 - he receives, by means of a second communication support (for example portable telephone or pager), a single use password,

- he keys the single use password into his keyboard of his terminal, and

- he fills out a marketing questionnaire permitting determining the types of commercial propositions to be sent to him.

When a commercial proposition corresponding to his requirement is sent to him, the customer receives a "alert" message, by means of the second communication support. In the course of this second connection:

- the customer then gets in touch with the service,
- he identifies himself by supplying an identification and/or a subscriber number,
- he receives, by means of a second communication support, a message certificate,
- he keys the message certificate into the keyboard of his terminal,
- he has access to the personal and confidential mailbox which contains the commercial proposition,
- he studies the proposition.

CLAIMS

1. Process for transmission of a secured electronic message, comprising:

- an operation of receiving by a data processing system, from a user, by means of a communication network:

. the message to be transmitted,
5 . an identification of the user, and
 . an identification of a destination for said message (603, 604);

- an operation of opening a communication session between a remote communication means corresponding to the identification of the destination of said message, and the information processing system;

- an operation of generating, by said information processing system, of a first so-called "confidential" 15 information for single use, which is to that it cannot be used except during said communication session;

and, during said communication session:

. performing an operation of transmitting, by the information processing system, of the first confidential 20 information by means of a first transmission support (605),

. performing an operation of receiving, by the information processing system, said first confidential information from a second transmission support different from the first transmission support (608),

25

. performing an operation of verifying the first confidential information (610), by said system of information processing, and

30

. if the first confidential information is verified, performing an operation of supplying the secured message, by the information processing system, to the remote communication means corresponding to the identification of the destination of said message.

2. Process according to claim 1, characterized in that it comprises moreover an operation of informing said user of the supply of the secured message to said destination.

3. Process according to any one of claims 1 or 2, characterized in that it comprises moreover an operation of authenticating said user.

4. Process according to claim 3, characterized in that said authentication operation of said user comprises:

5

- an operation of generating, by said information processing system, a second so-called "confidential" information for single use;

- an operation of supplying to said user, by said information processing system, of the second confidential information, on a third transmission support (605),

10

- an operation of receiving, by the information processing system, of the second confidential information, on a fourth transmission support different from the third transmission support (608),

- an operation of verifying the second confidential information (610) by said system of information processing.

5. Process according to claim 4, characterized in that it comprises moreover an operation of delivering to said destination a certificate which identifies said user.

6. Process according to any one of claims 1 to 5, characterized in that it comprises an operation of memorizing at least one record of at least one operation, in the information processing system.

7. Process according to any one of claims 1 to 6, characterized in that the first transmission support is a wireless support.

8. Process according to any one of claims 1 to 7, characterized in that the second transmission support is the Internet.

9. Device for transmitting a secured electronic message comprising processing means adapted to:

- receive from a user, by means of a communication network:

. the message to be transmitted,
. an identification of the user, and
. an identification of a destination of said message (603, 604);

- opening a communication system with a remote communication means corresponding to the identification of the destination of said message;

- generating a first so-called "confidential" information for single use, which is to say that it cannot be used but during said communication session;

15

and, during said communication session:

. transmitting the first confidential information by means of a first transmission support (605),

20

. receiving said first confidential information from a second transmission support different from the first transmission support (608),

25

. verifying the first confidential information (610), and

. if the first confidential information is verified, supplying the secured message to said destination, by means of a transmission support.

10. Device according to claim 9, characterized in that the processing means are adapted moreover to transmit information to said user as to the supply of the secured message to said destination.

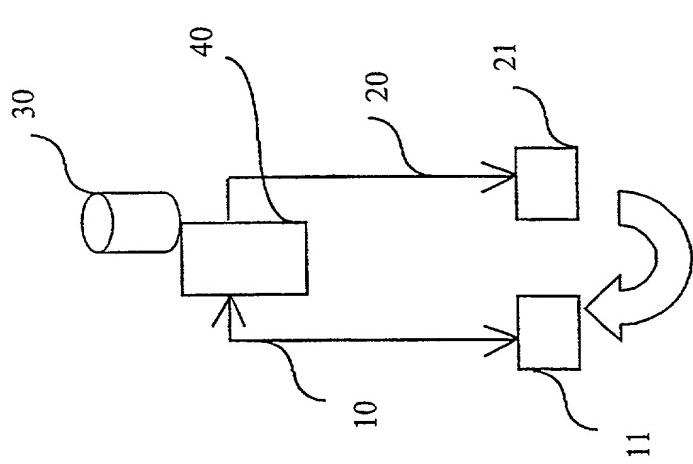


Fig 1

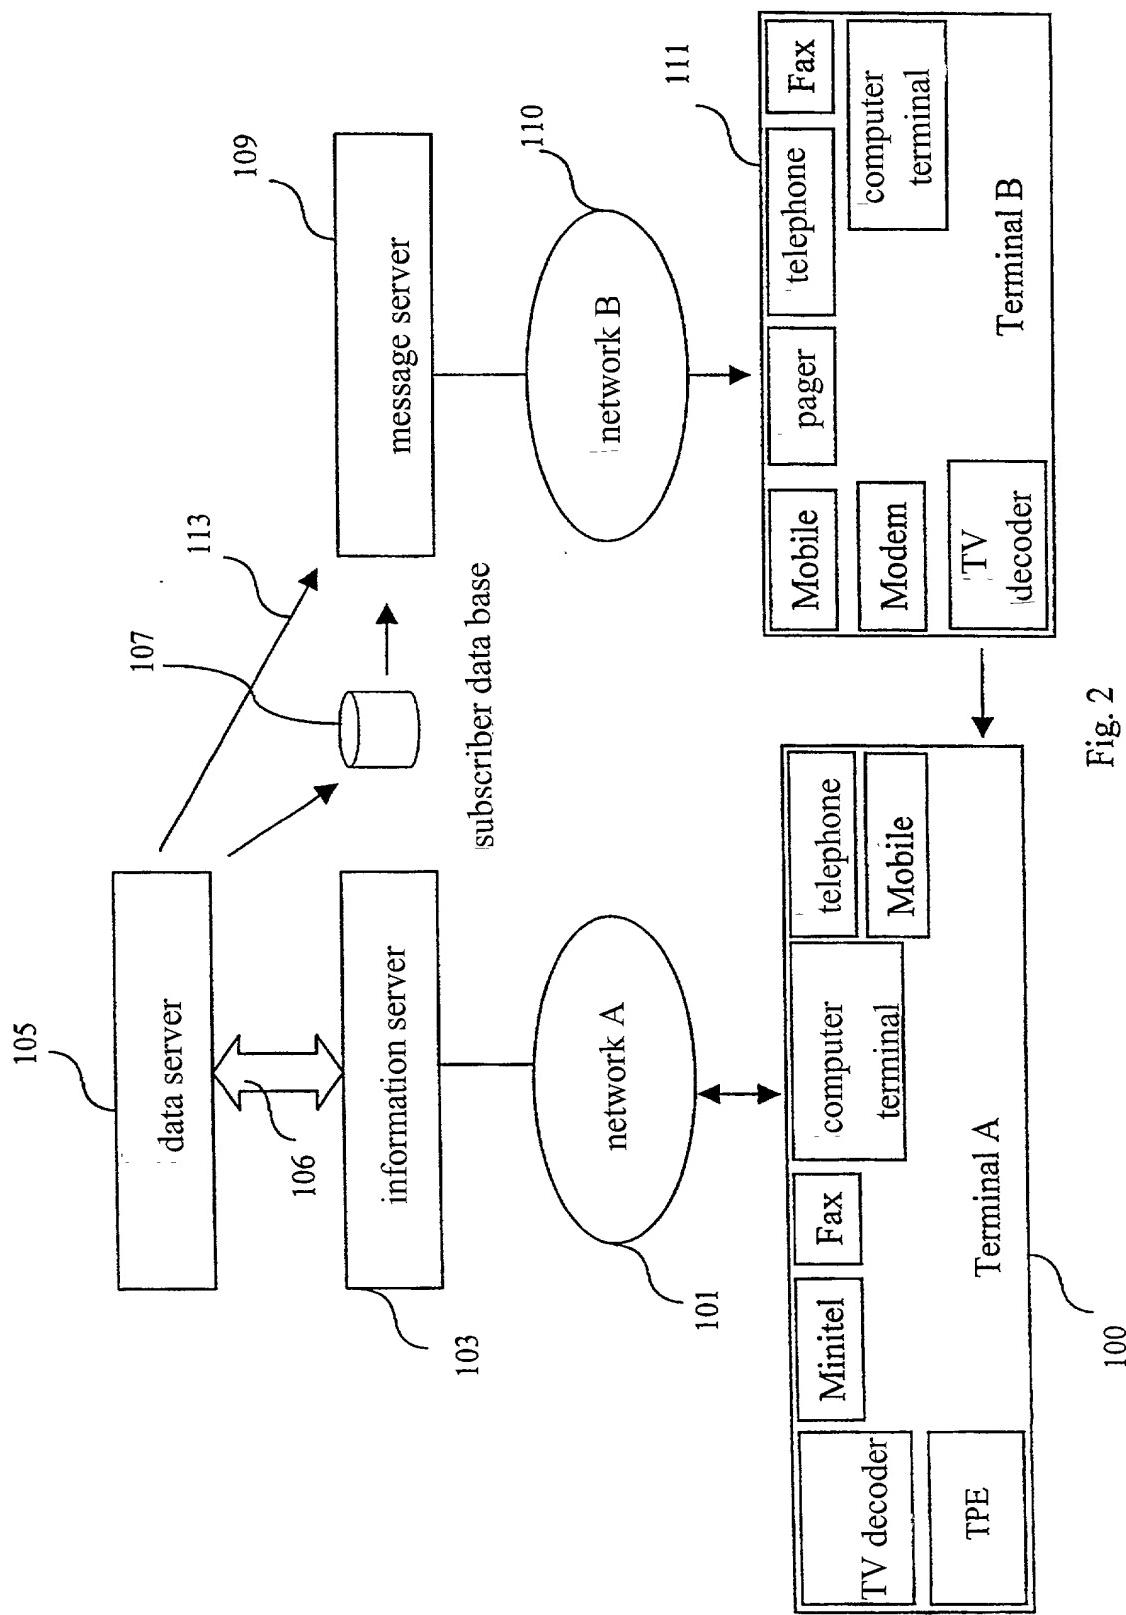


Fig. 2

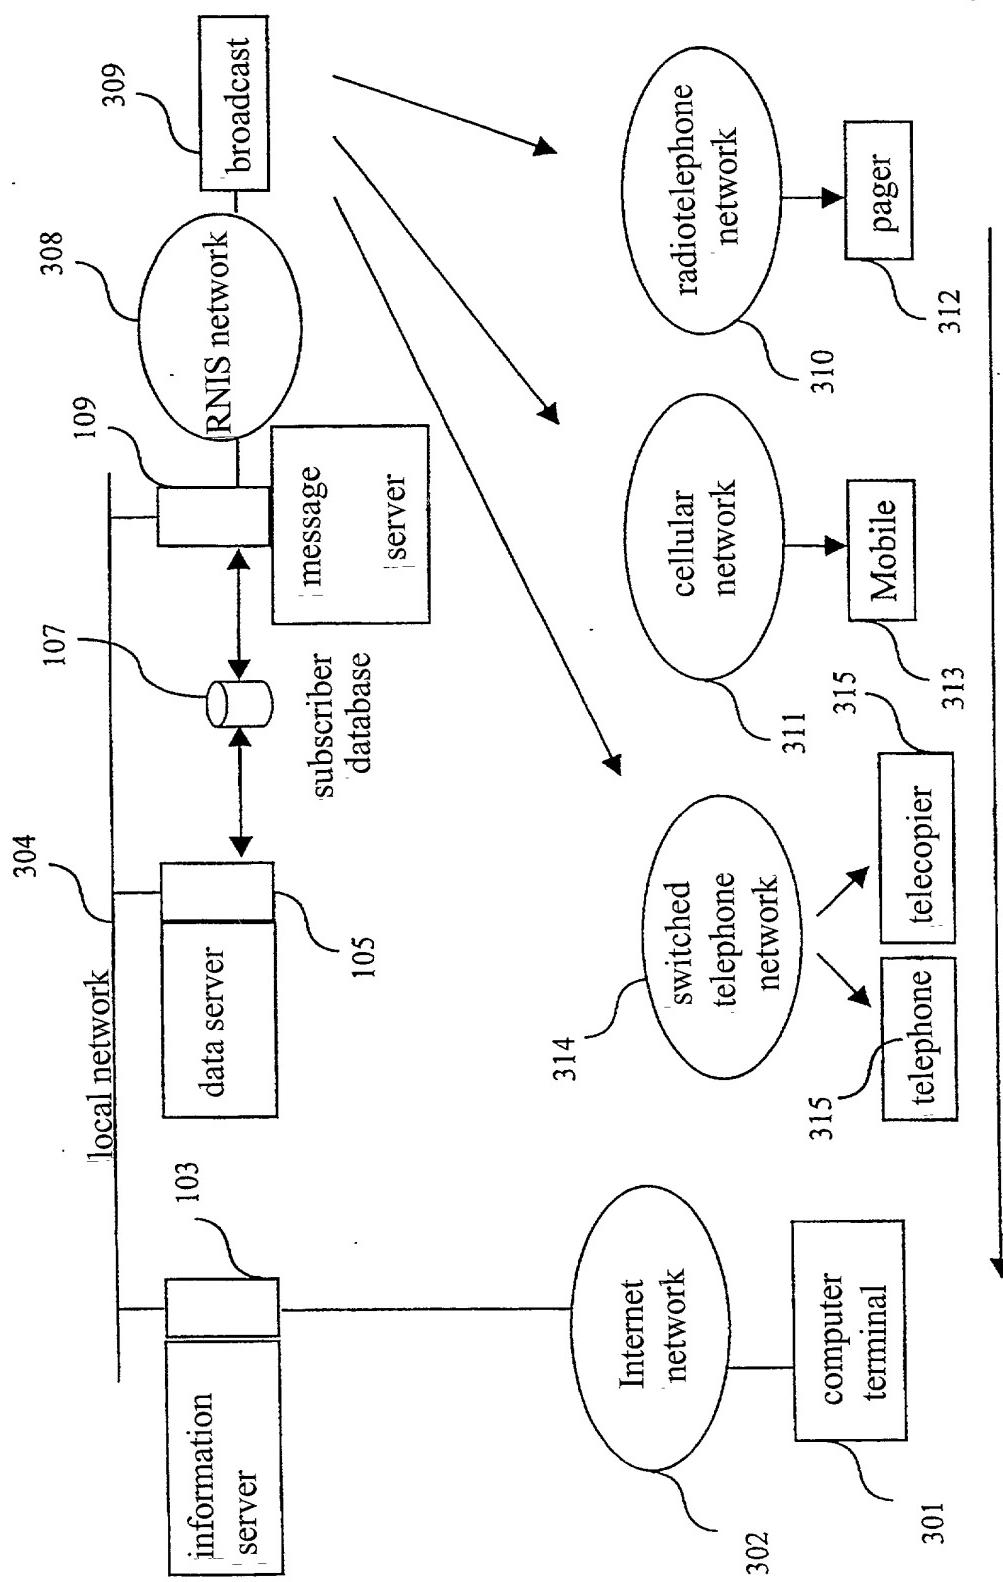


Fig. 3

4/13

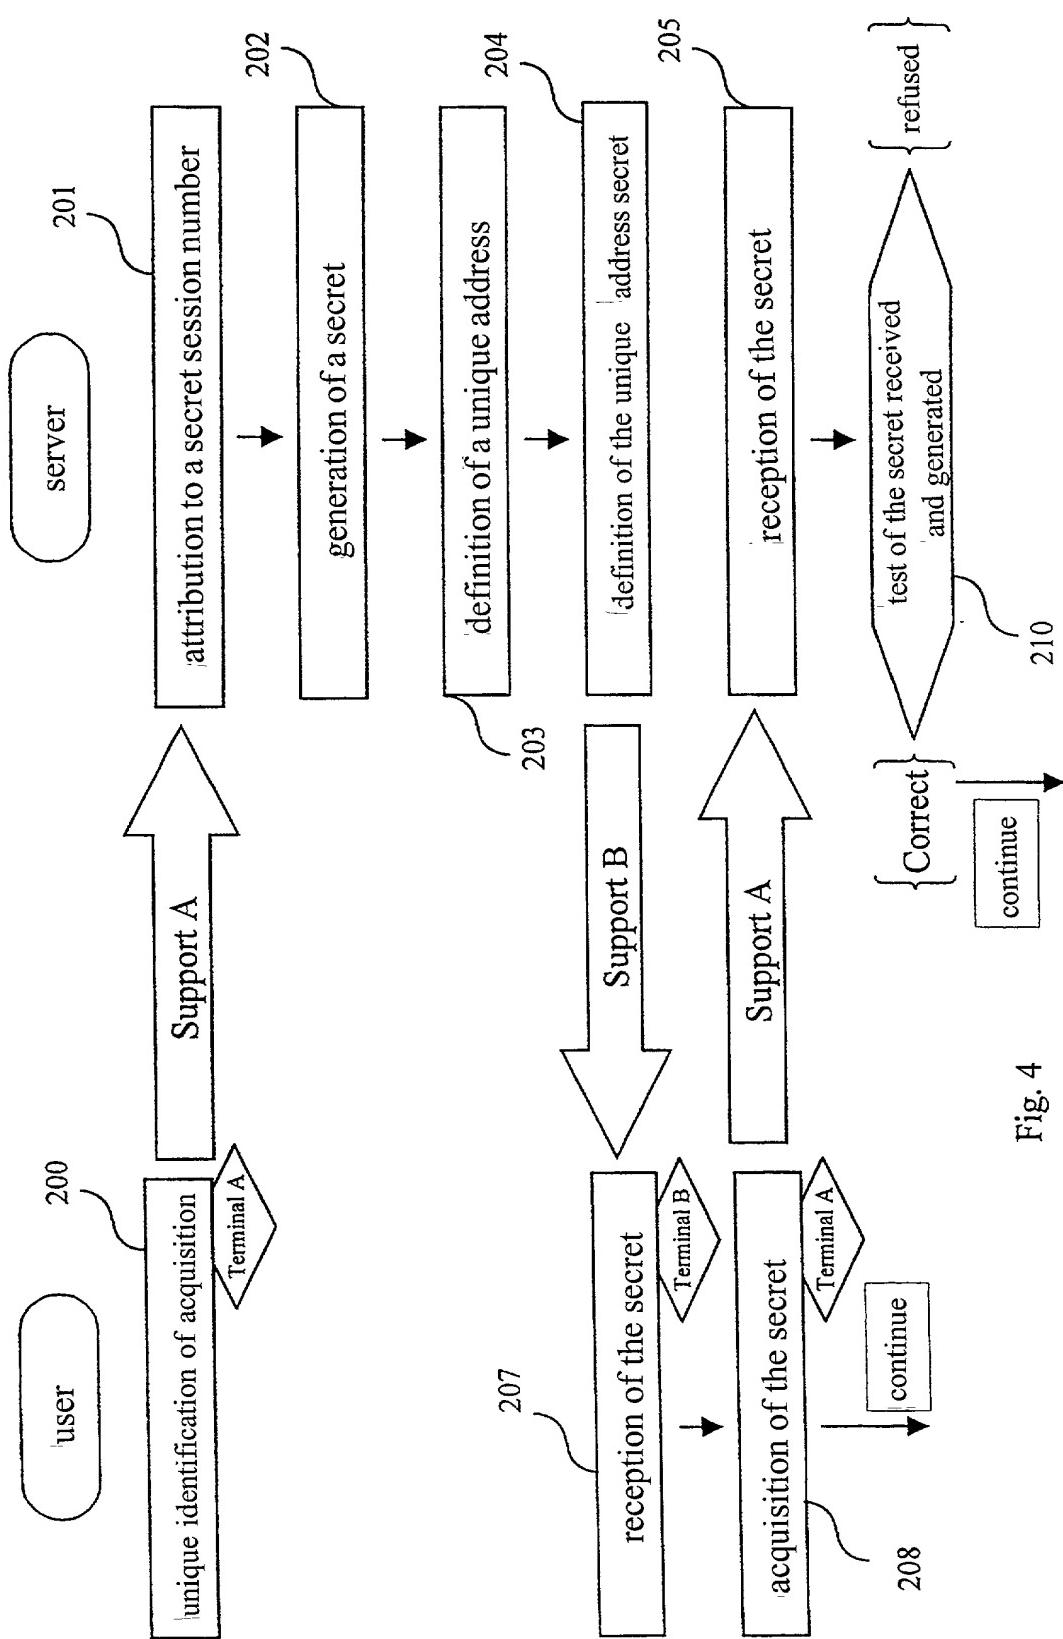


Fig. 4

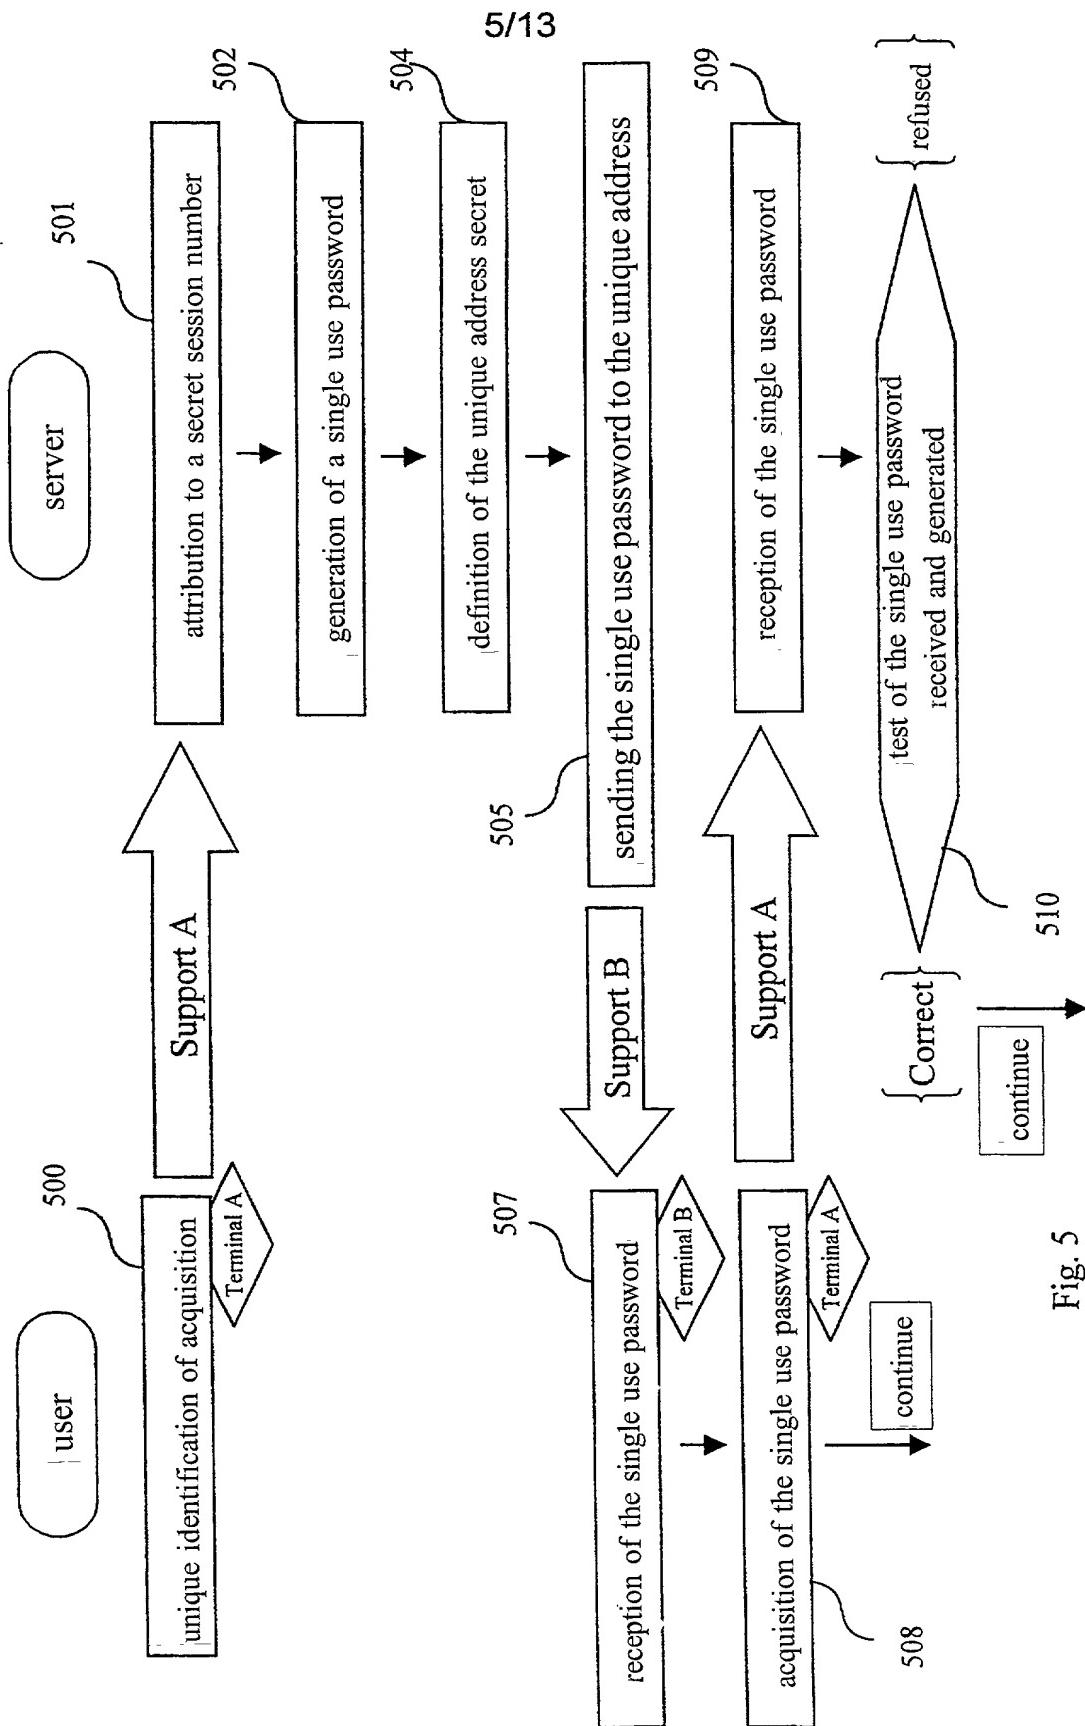


Fig. 5

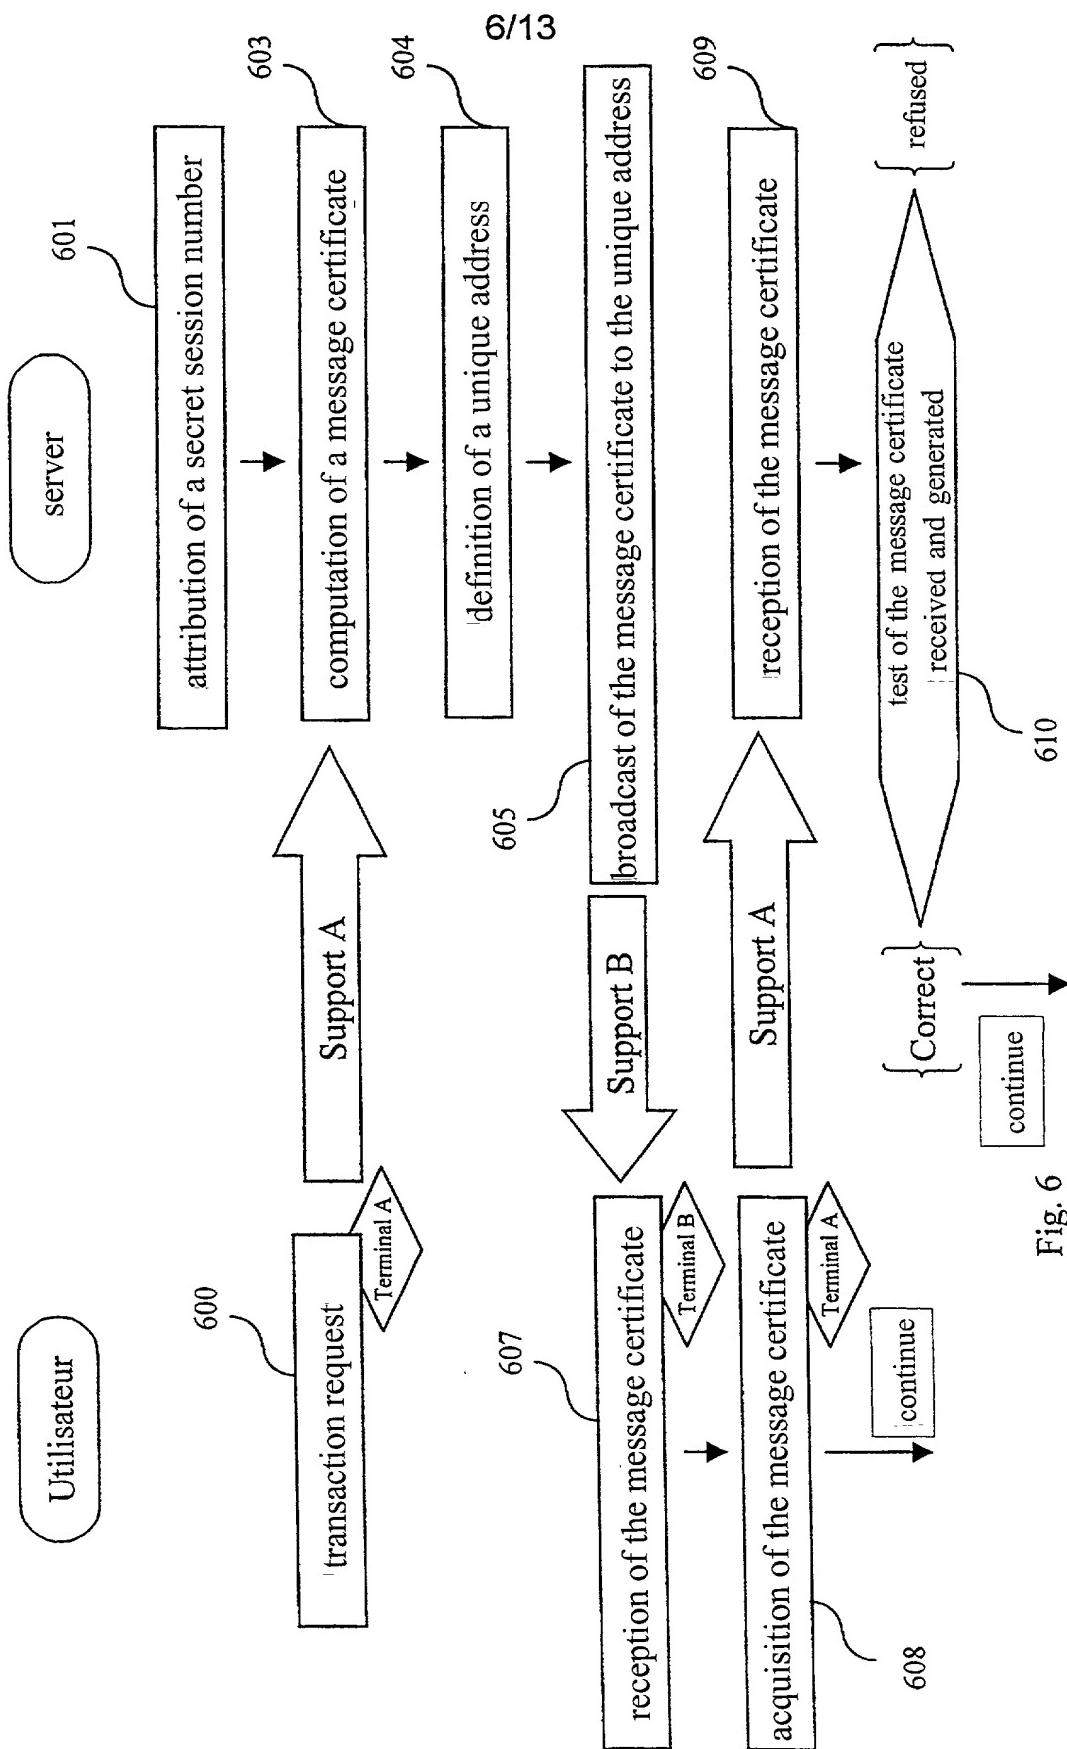


Fig. 6


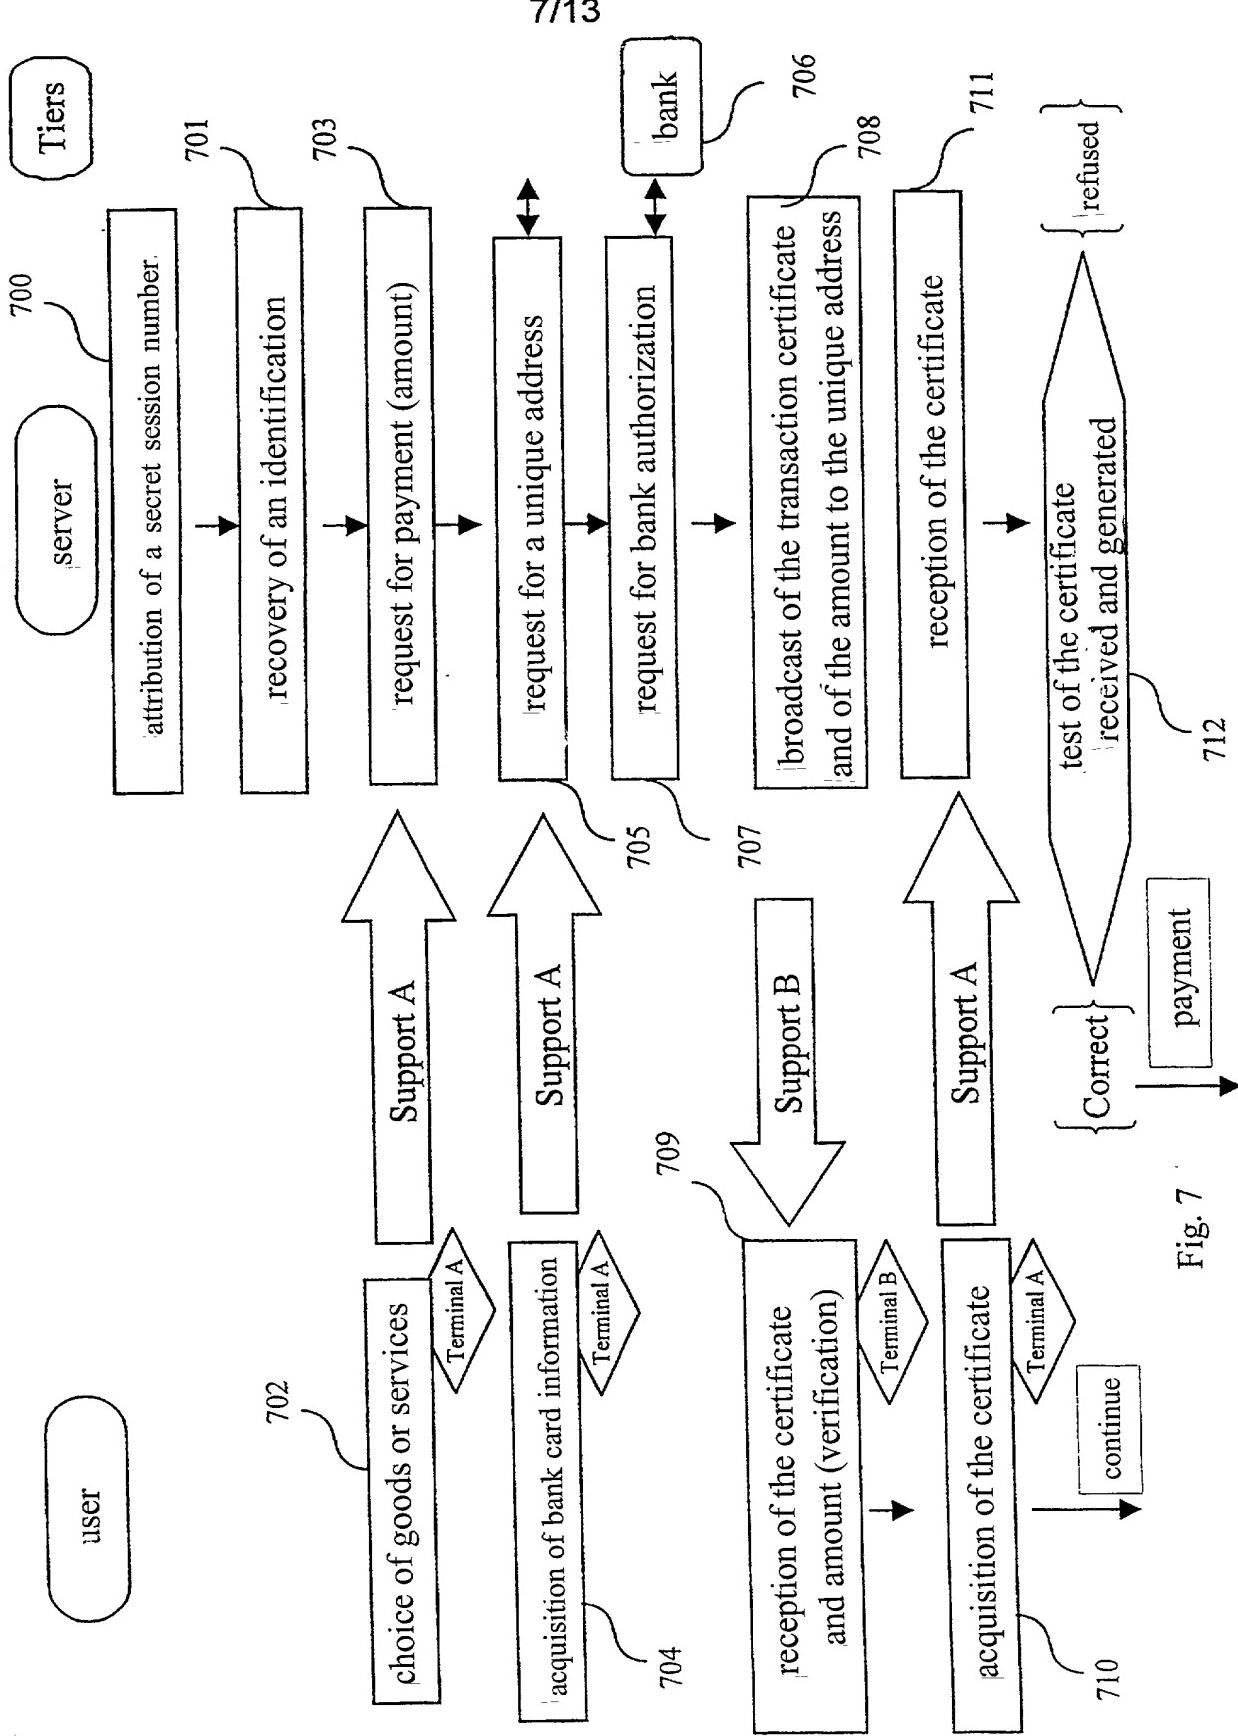


Fig. 7

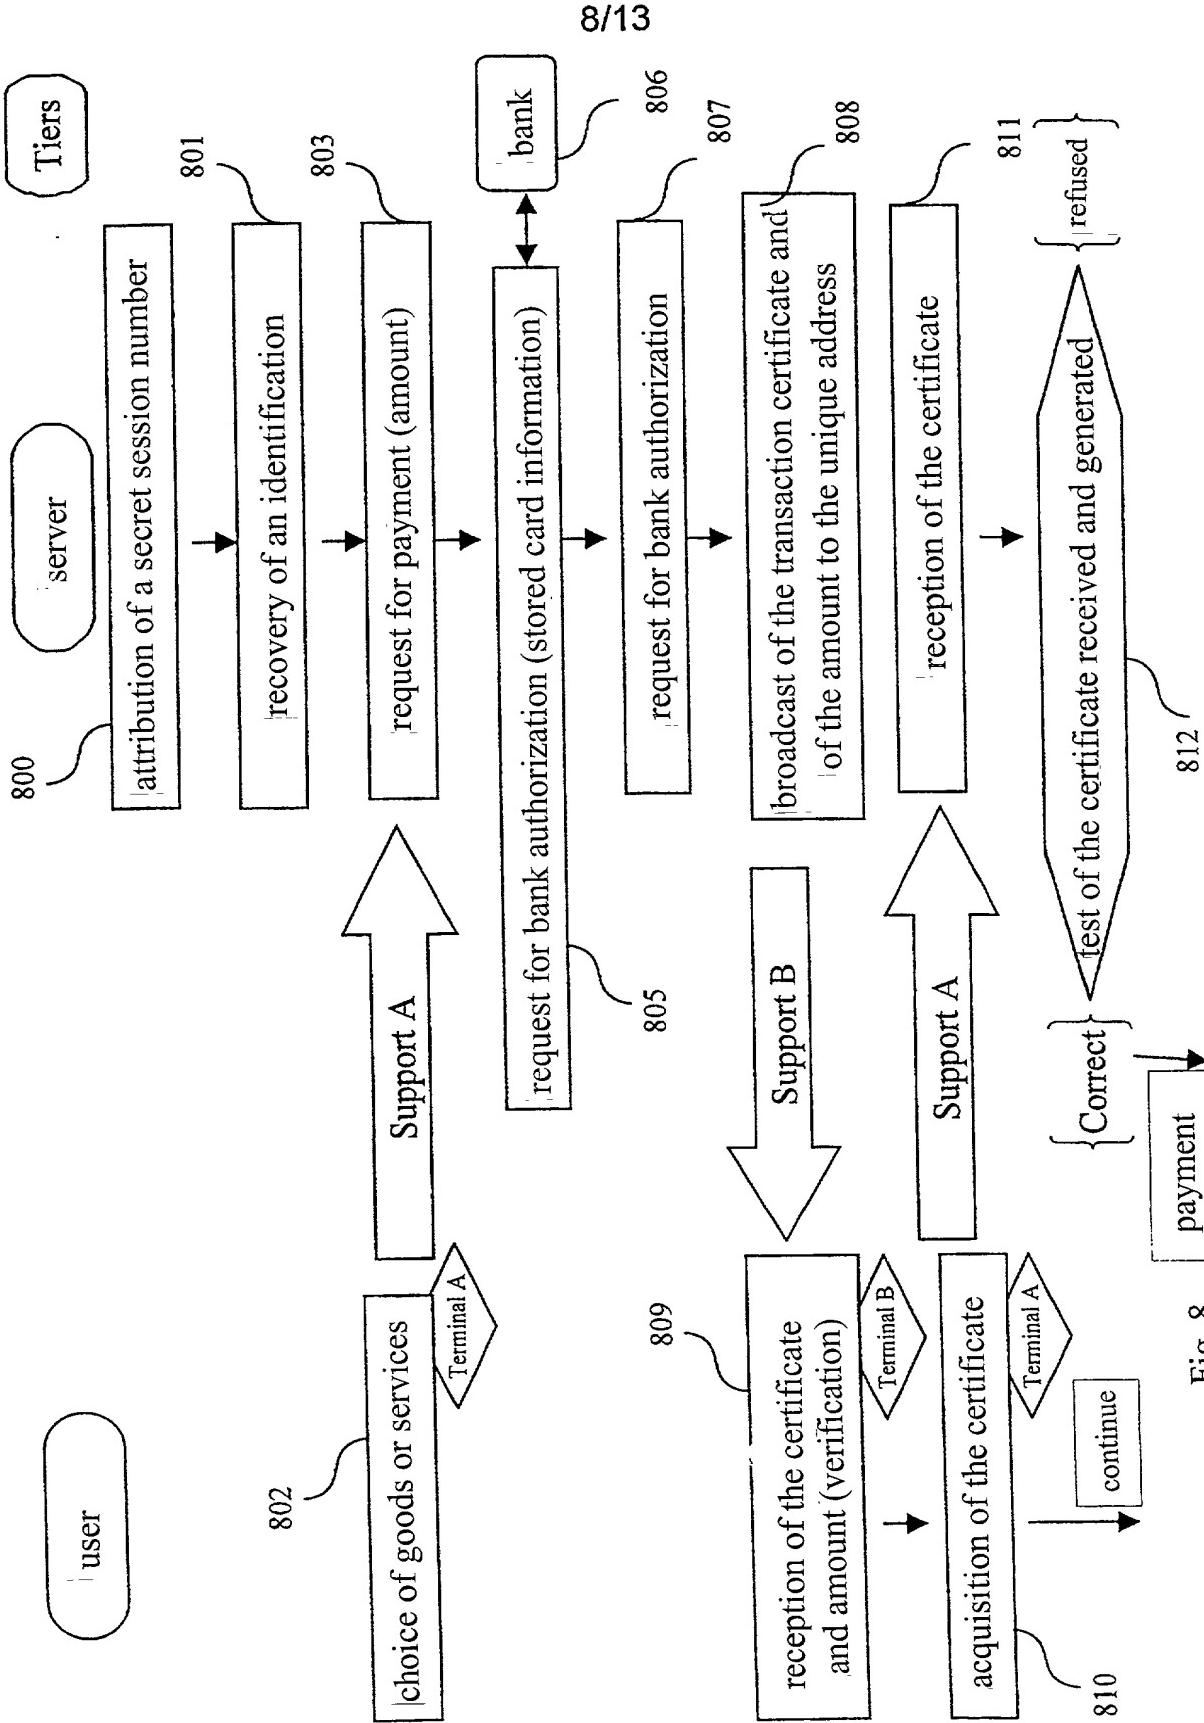

8

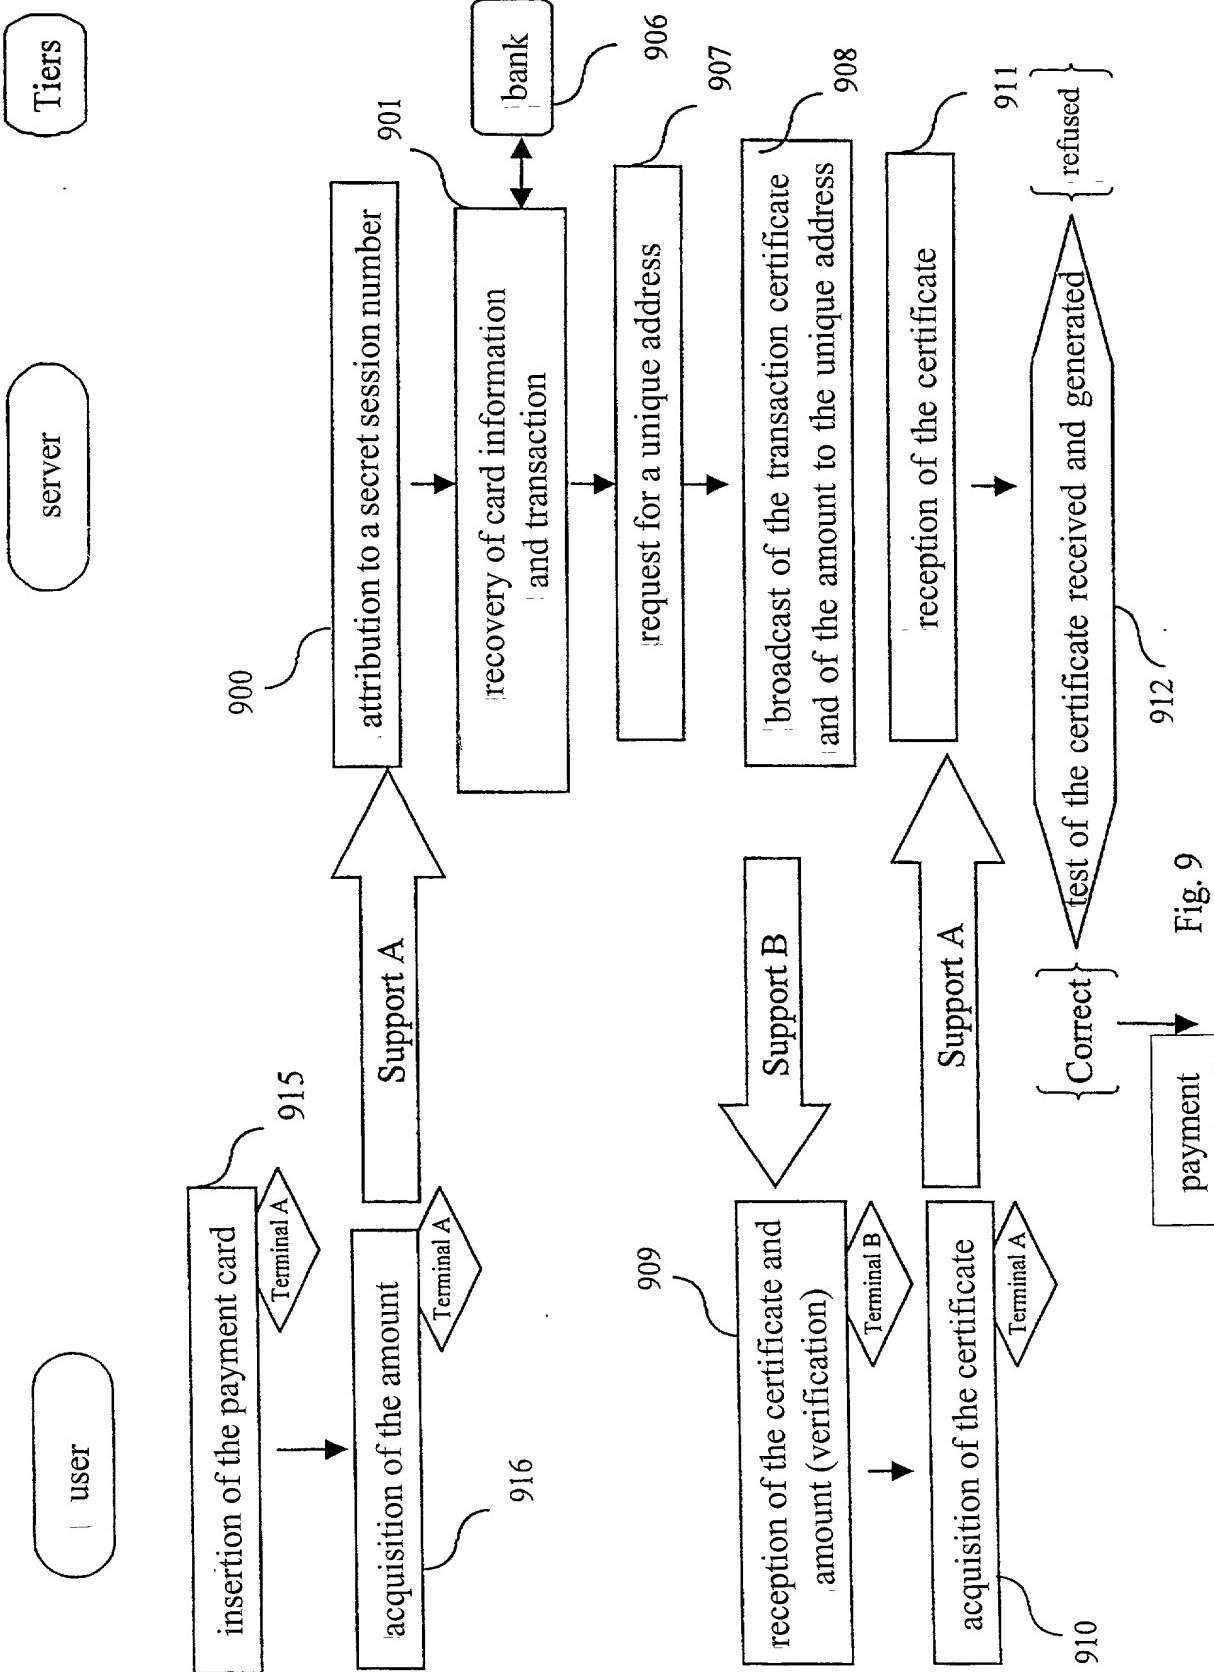


Fig. 9

10/13

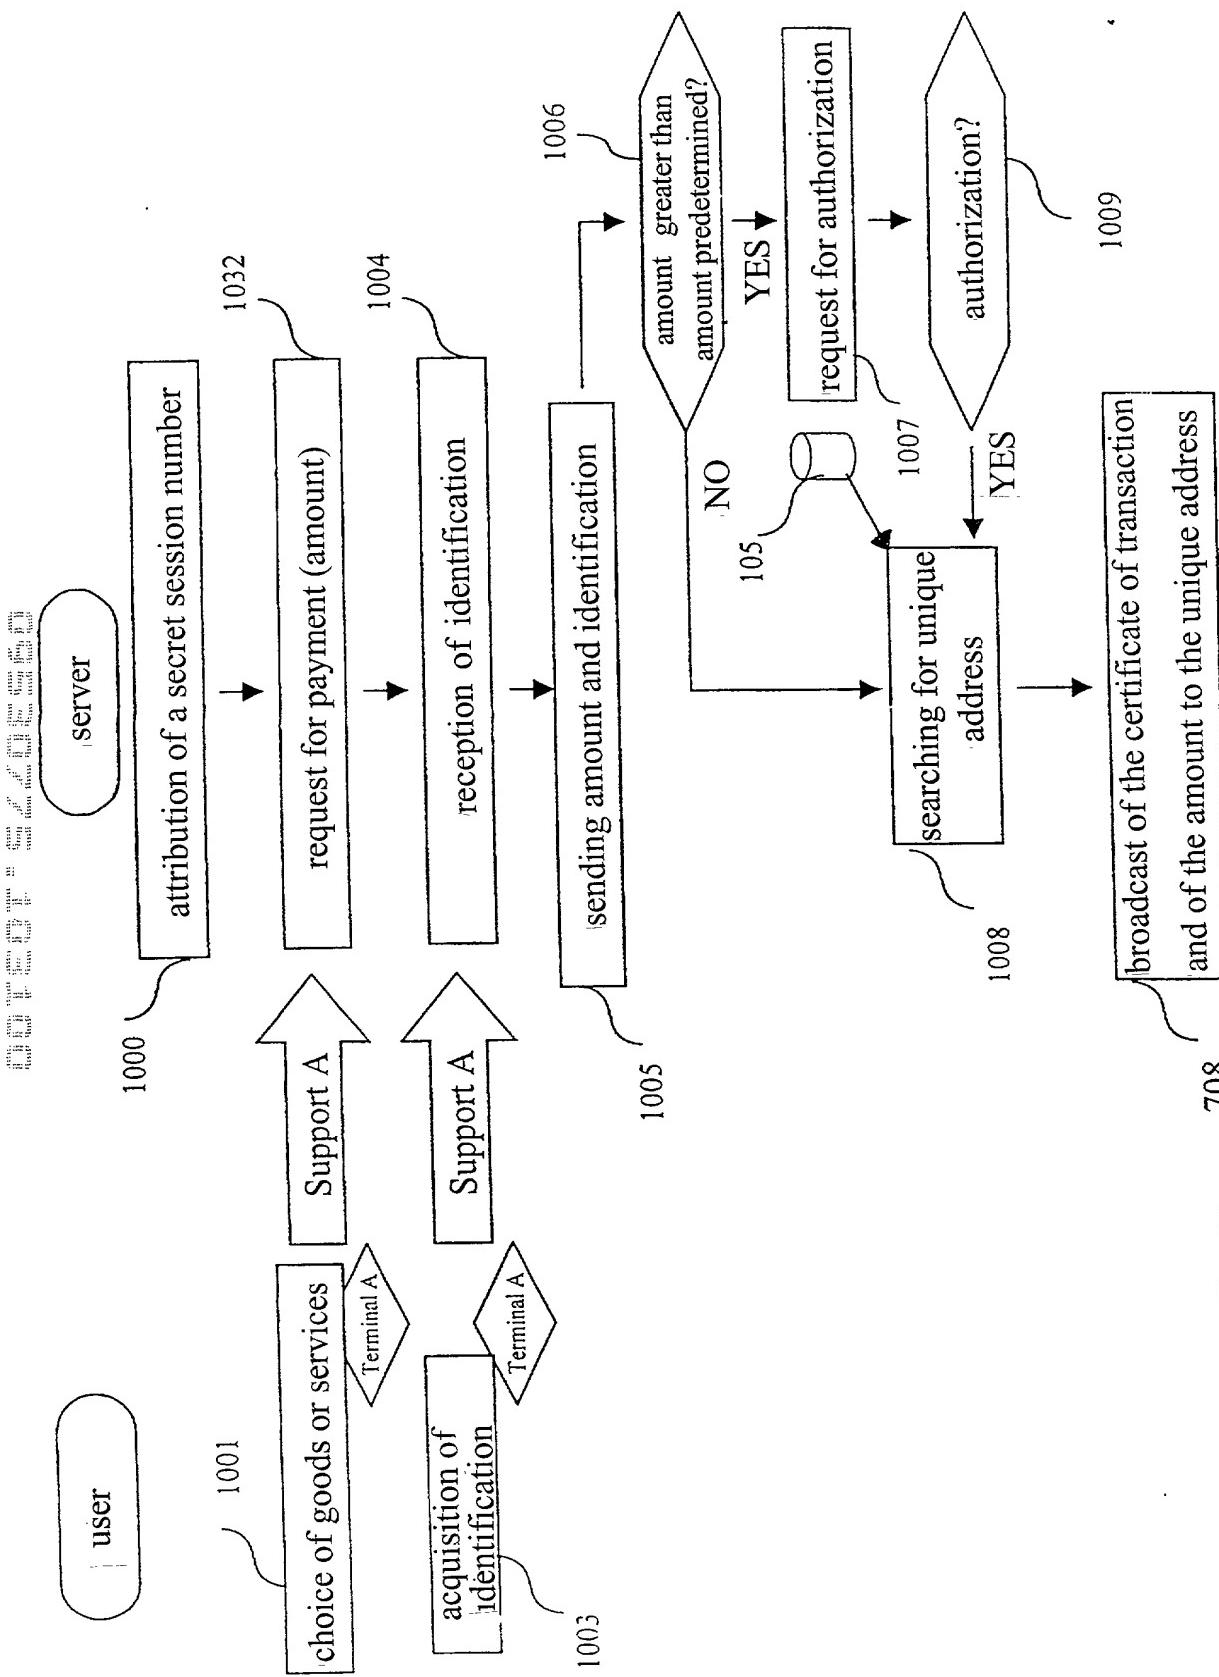


Fig. 10

708

11/13

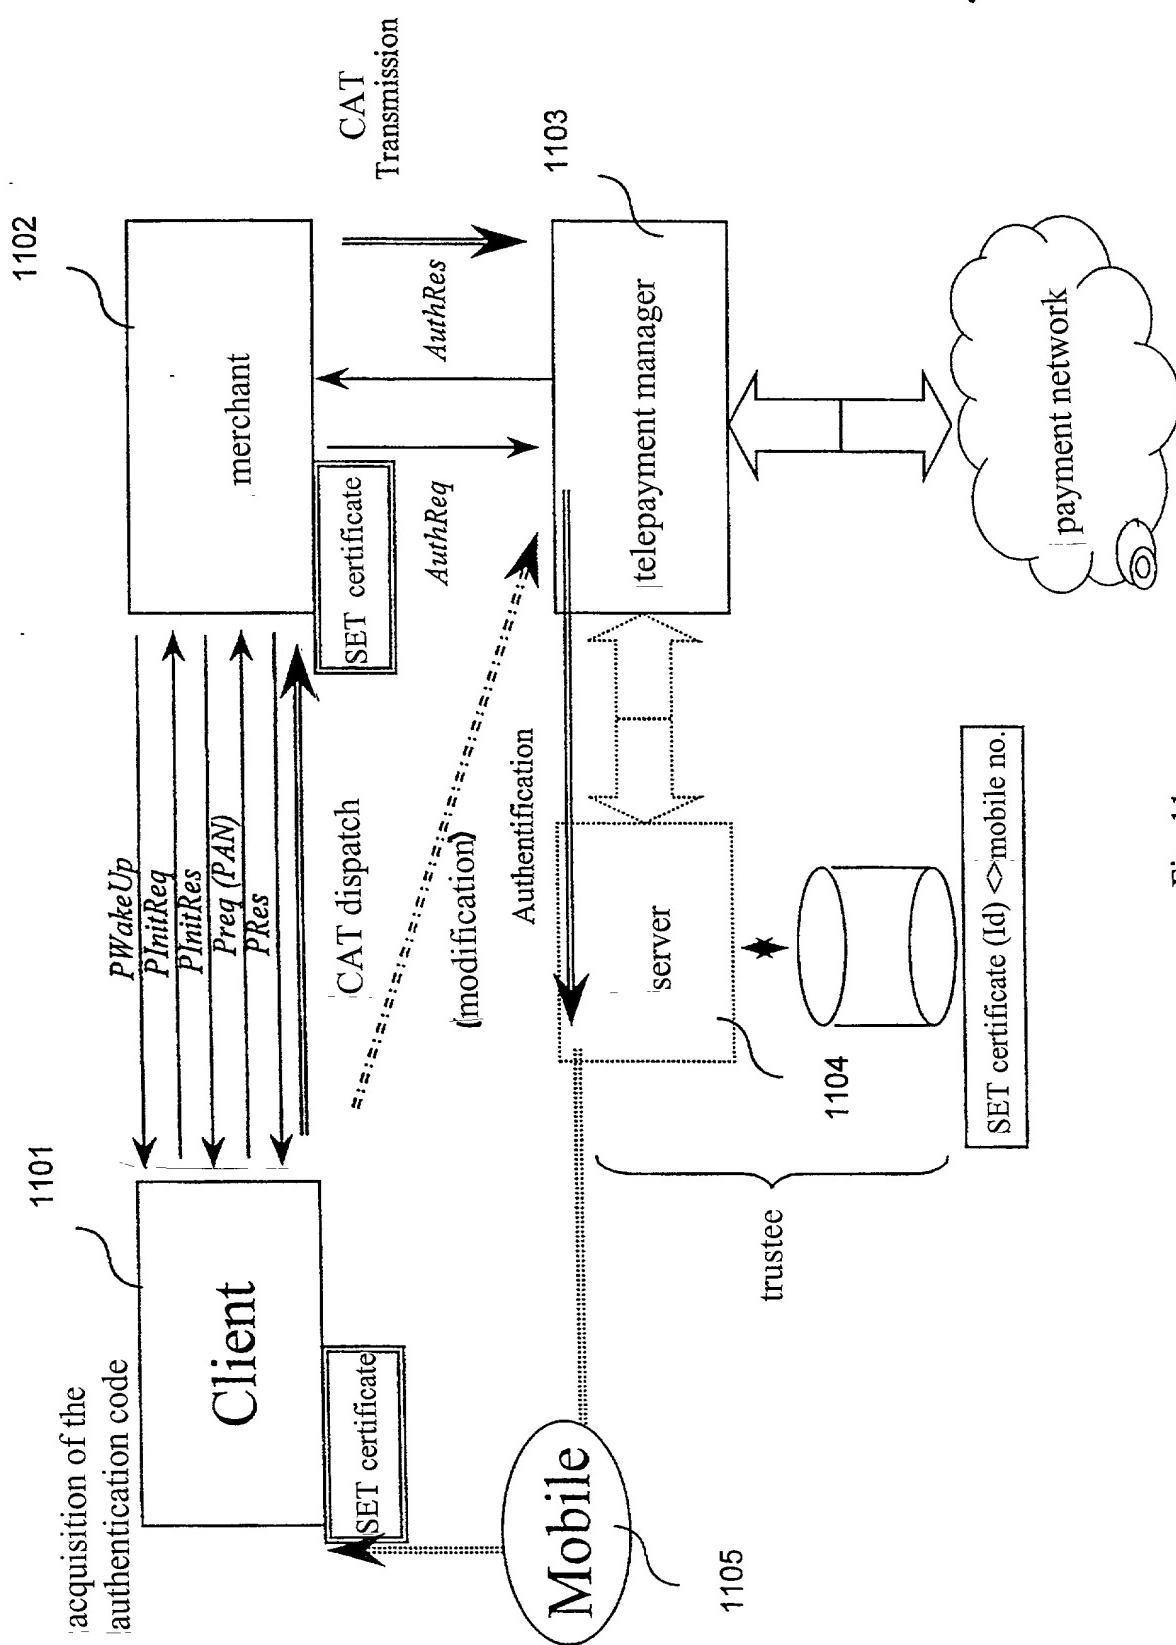


Fig. 11

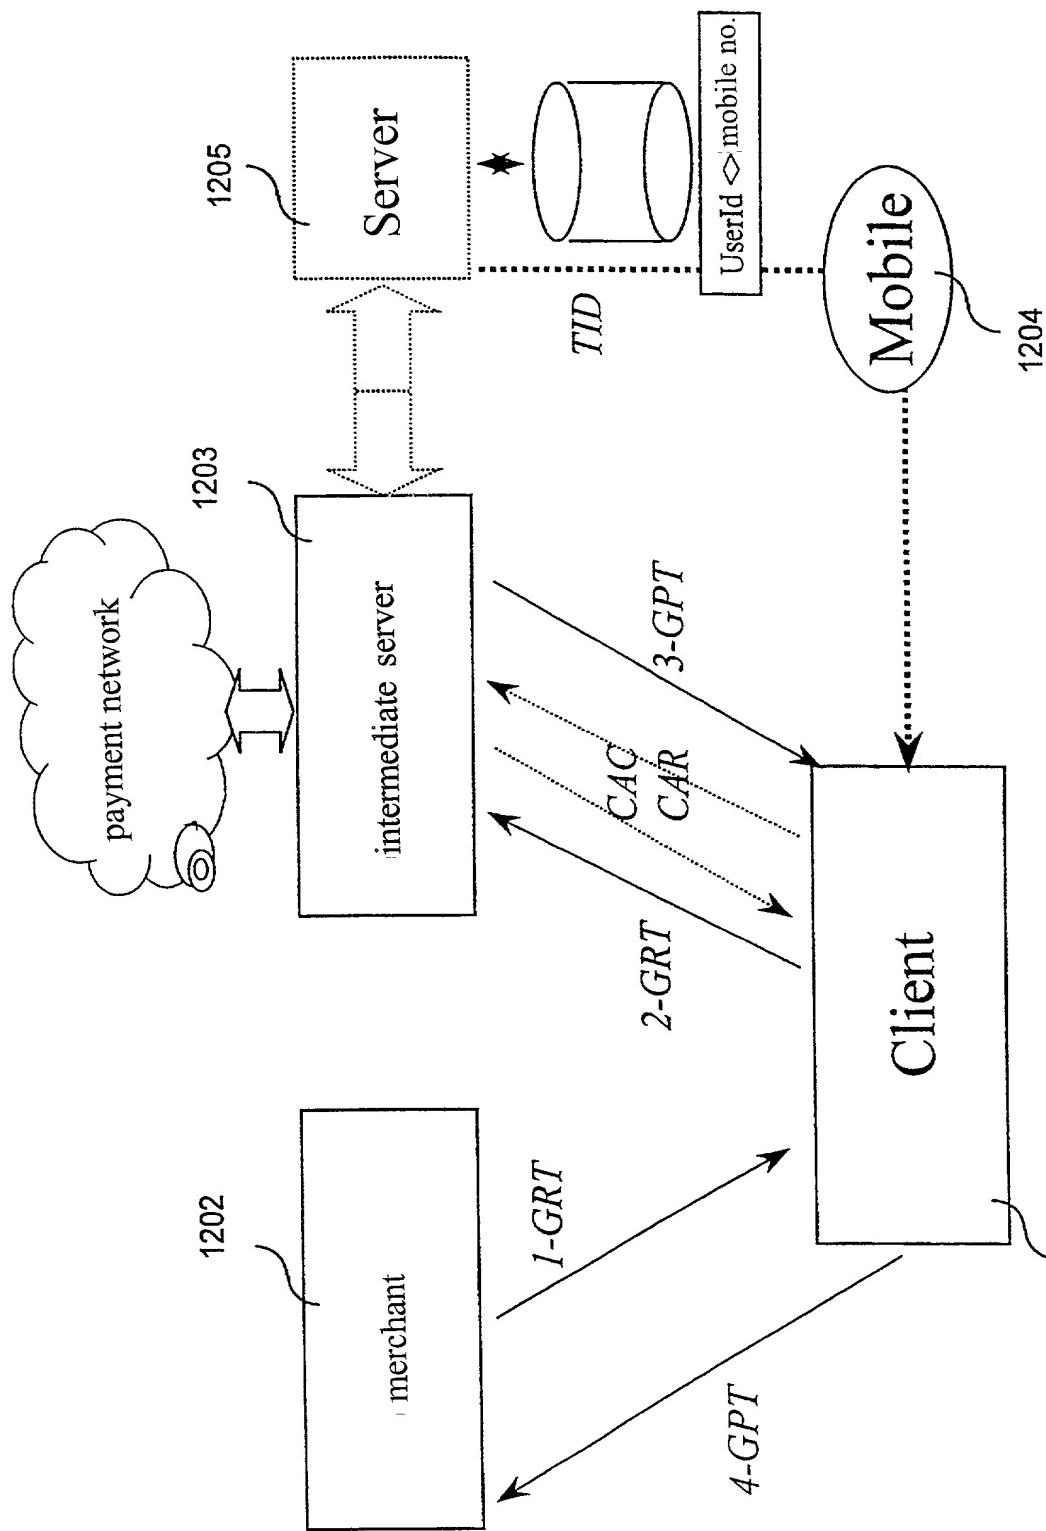


Fig. 12

1201

13/13

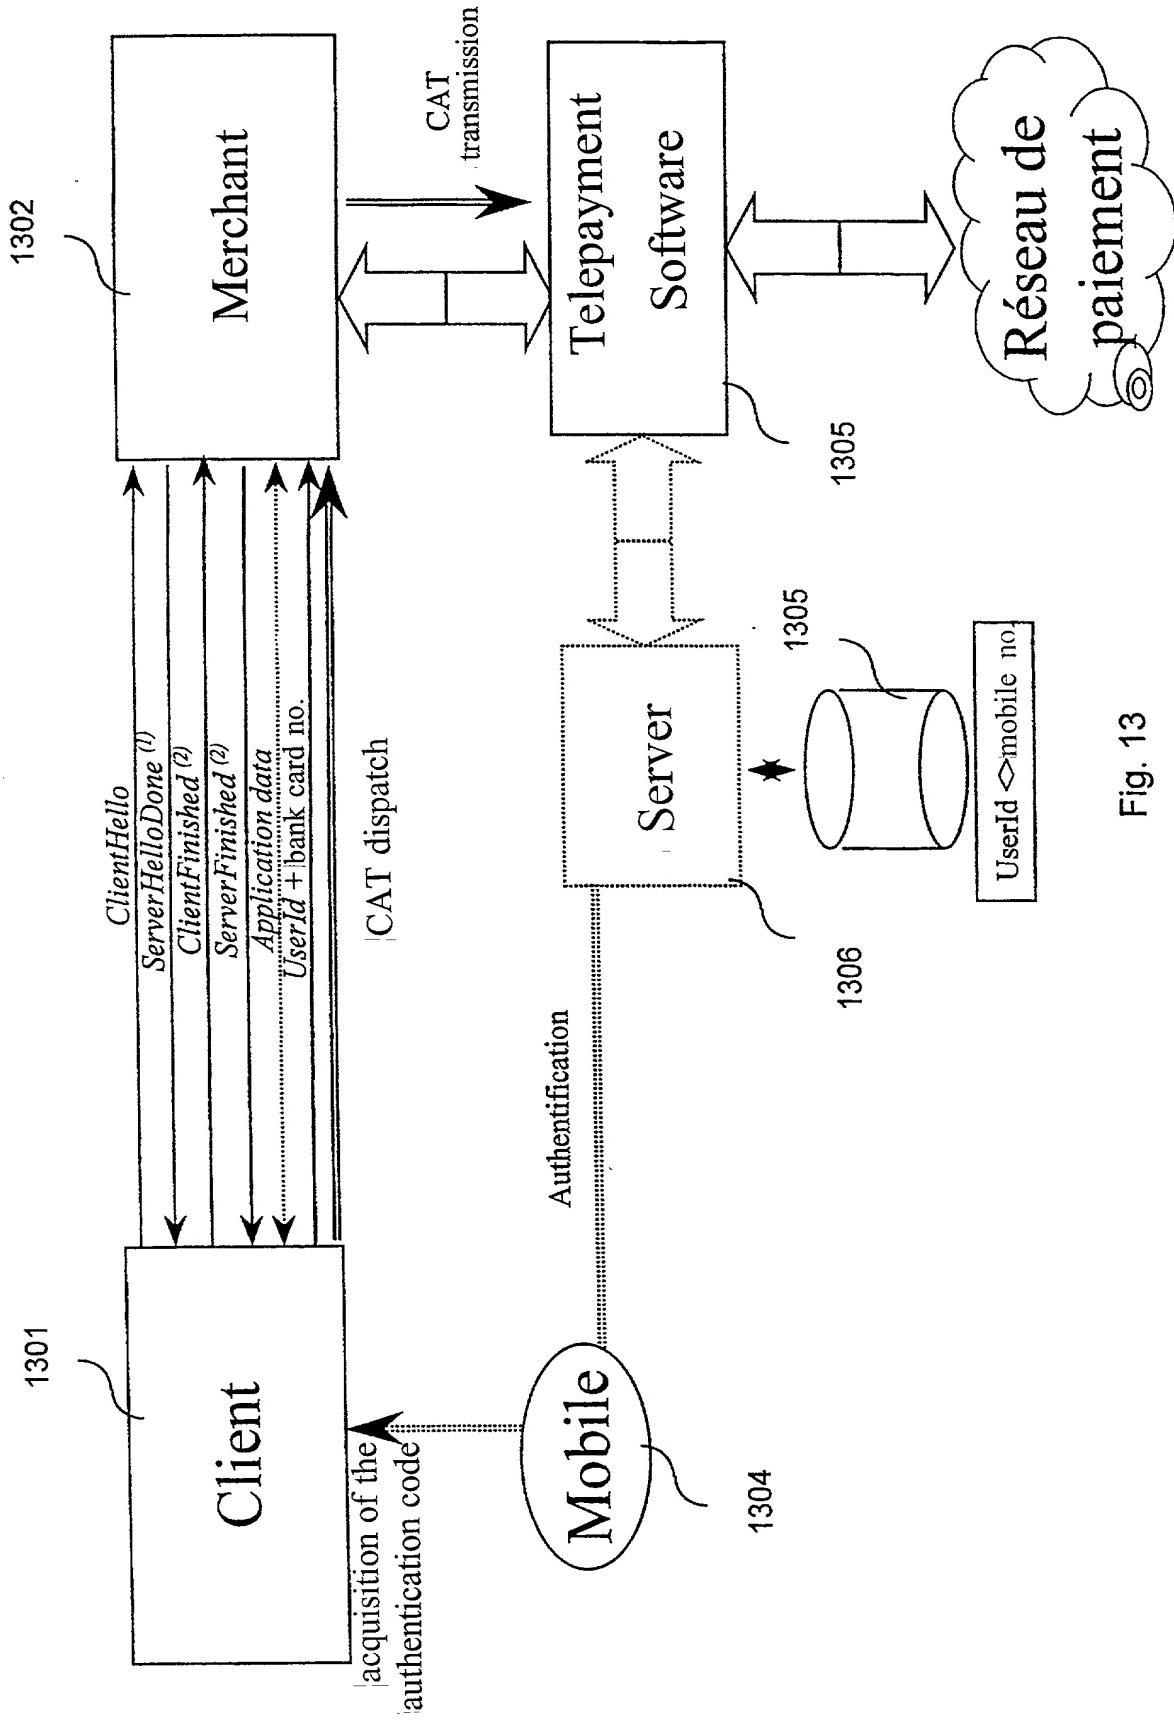


Fig. 13

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PROCESS FOR THE TRANSMISSION OF INFORMATION AND SERVER USING IT

the specification of which: (check one)

REGULAR OR DESIGN APPLICATION

- is attached hereto.
- was filed on May 4, 2000 as application Serial No. 09/530,775 and was amended on _____ (if applicable).

PCT FILED APPLICATION ENTERING NATIONAL STAGE

- was described and claimed in International application No. PCT/FR98/02348 filed on 03 November 1998 and as amended on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

PRIORITY CLAIM

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

Country	Application Number	Date of Filing (day, month, year)	Priority Claimed
France	97 13825	04 November 1997	Yes

(Complete this part only if this is a continuing application.)

I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status—patented, pending, abandoned)

POWER OF ATTORNEY

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from **Georges Cornuejols, Esq.**, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

As a named inventor, I hereby appoint the registered patent attorneys represented by Customer No. **000466** to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, including: **Robert J. PATCH, Reg. No. 17,355, Andrew J. PATCH, Reg. No. 32,925, Robert F. HARGEST, Reg. No. 25,590, Benoît CASTEL, Reg. No. 35,041, Eric JENSEN, Reg. No. 37,635, Thomas W. PERKINS, Reg. No. 33,027, and Roland E. LONG, Jr., Reg. No. 41,949**

c/o YOUNG & THOMPSON,
Second Floor,
745 South 23rd Street,
Arlington, Virginia 22202.



Address all telephone calls to Young & Thompson at 703/521-2297. Telefax: 703/685-0573.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(initials) Full name of sole or first inventor: **Gilles KREMER**

(given name, family name)

(initials) Inventor's signature

Date **16/10/00**

Residence: **Vanves, France** *FRX*

Citizenship: **French**

Post Office Address: **34, Avenue de la Paix
92170 Vanves, France**

(initials) Full name of second joint inventor, if any: **Patrick CHANUDET**

(given name, family name)

(initials) Inventor's signature

Date **Le 16 octobre 2000**

Residence: **Asnières, France** *FRX*

Citizenship: **French**

Post Office Address: **17 bis, rue de la Station
92600 Asnières, France**